CUSTOMER APPROVED (ALL PAGE):		CUSTOMER REQUIREMENT:	

PIN FUNCTION

NO.	SYMBOL
1	GND
2	D0(SCK)
3	D3(SDA)
4	/RST
5	CS0
6	CD
7	TST4
8	ID
9	VSS
10	VDD
11	VB0+
12	VB1+
13	VB1−
14	VB0−
15	VLCD
16	GND

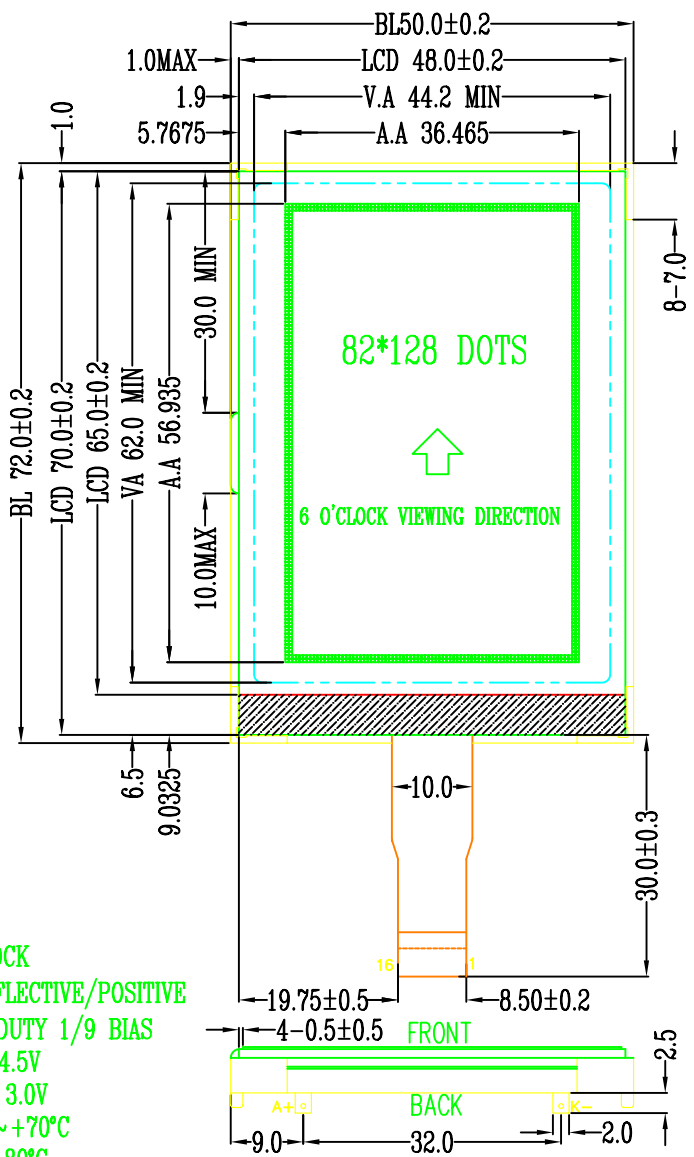

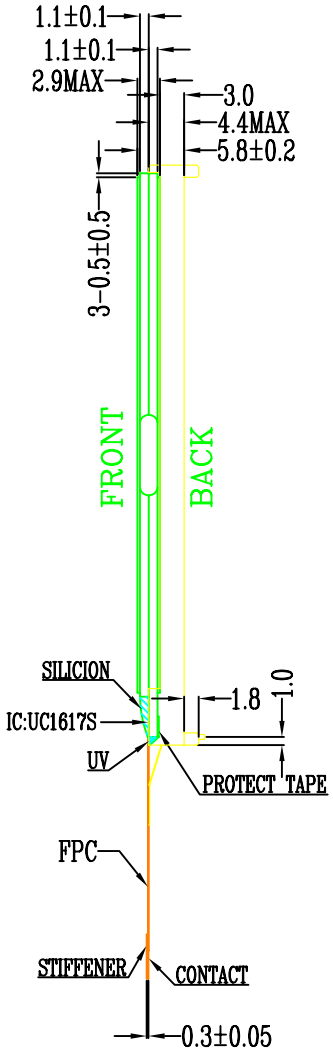

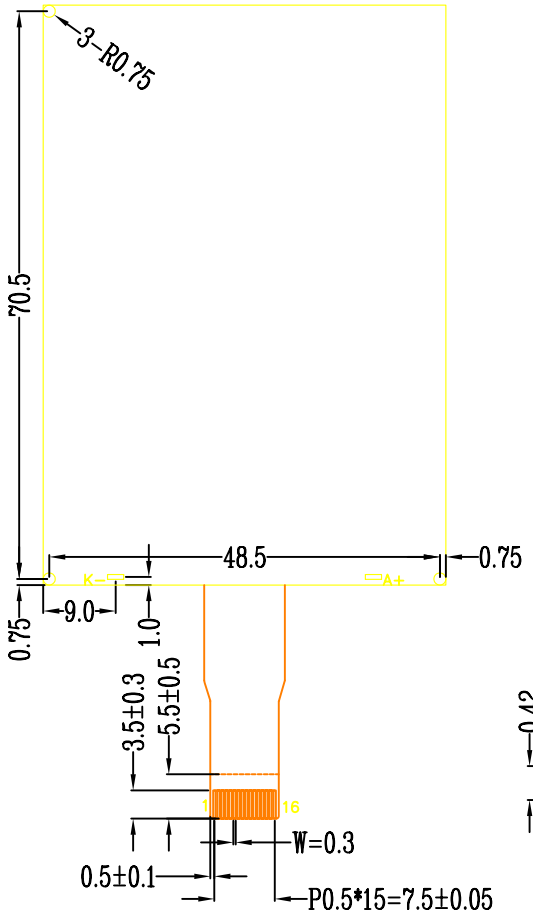

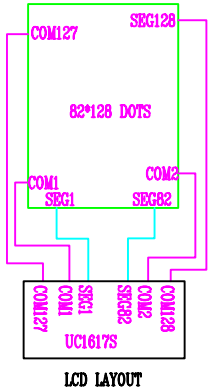



NOTES:
1.DISPLAY TYPE: FSTN
2.VIEW DIRECTION: 6 O'CLOCK
3.POLARIZER TYPE: TRANSFLECTIVE/POSITIVE
4.DRIVER METHOD: 1/128 DUTY 1/9 BIAS
5.LCD DRIVING VOLTAGE: 14.5V
6.LOGIC SUPPLY VOLTAGE: 3.0V
7.OPERATING TEMP: −20°C~+70°C
8.STORAGE TEMP: −30°C~+80°C
9.CONNECTOR TYPE: COG+FPC
10.CONTROLLER/DRIVE IC: UC1617S
11.MCUINTERFACE:SPI-4 LINE INTERFACE
12.BACKLIGHT: WHITE
DRIVER METHOD [VLED=3.1±0.2V, ILED=60mA]
13.OTHER TOLERANCE: ±0.2mm

NO.	CONTENT	DATE
	AMEND	
C		
B		
A	NEW	2016.01.08

SUNLIKE DISPLAY TECH.CORP.

APPROVALS		DATE
APP		
CHK		
DWN	Wendy jiang	16.03.31

AMG082128A

PROJECTION	VERSION	A	UNIT: MM	NO. 1/1