



6 O'CLOCK VIEWING DIRECTION



Internal Connection

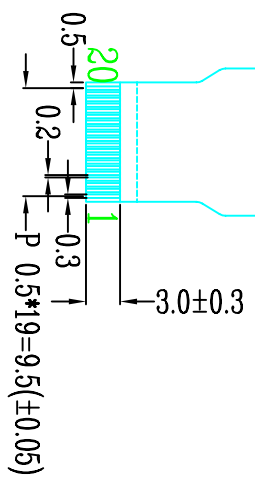

IC CONNECT WITH LCD

Pin Name	Connection
MS	H:Master Mode
CLS	H:Internal Clock
/HPM	L:High Power Mode

LCD	IC
S0~S121	SEG0~SEG121
C0,C1...C31	COM0,COM1...COM31

PIN DESCRIPTION:

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SYMBOL	CS1B	RSTB	A0	SCL	SDA	VDD	VSS	VOUT	CAP3P	CAP1N	CAP1P	CAP2P	CAP2N	V4	V3	V2	V1	V0	C86	P/S

SUNLIKE DISPLAY TECH.CORP.

AMEND

- NOTES:
- 1.DISPLAY TYPE: STN/Y-G
 - 2.VIEW DIRECTION: 6 O'CLOCK
 - 3.POLARIZER TYPE: REFLECTIVE/POSITIVE
 - 4.DRIVER METHOD: 1/33 DUTY 1/6 BIAS
 - 5.LCD DRIVING VOLTAGE: 8.0V
 - 6.LOGIC SUPPLY VOLTAGE: 3.3V
 - 7.OPERATING TEMP: 0°C~+50°C
 - 8.STORAGE TEMP: -20°C~+70°C
 - 9.CONNECTOR TYPE: COG+FPIC
 - 10.CONTROLLER/DRIVE IC: ST7565R
 - 11.OTHER TOLERANCE: ±0.2mm

NO.	AMEND	CONTENT	DATE	APP	CHK	DATE	APP	CHK	DATE	PROJECTION	VERSION	UNIT: MM	NO.1/1
1	NEW	NEW	2015.06.24	APP	CHK	2015.06.24	APP	CHK	2015.06.24	PROJECTION	AMG122032A		