



PIN ASSIGNMENT:

PIN	SYMBOL
1	VDD
2	PSB
3	C68
4	NC
5	V0
6	V1
7	V2
8	V3
9	V4
10	G2N
11	G2P
12	G1P
13	G1N
14	G3P
15	VOUT
16	GND
17	VDD
18	DB7
19	DB6
20	DB5
21	DB4
22	DB3
23	DB2
24	DB1
25	DB0
26	E(RD)
27	R/W(WR)
28	A0
29	/RES
30	CS1

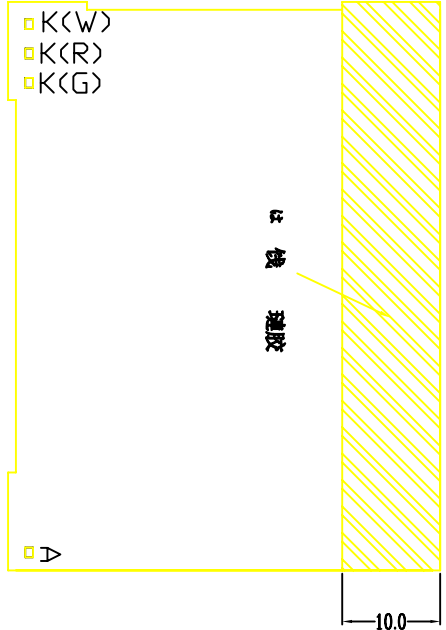

- NOTES:
- 1.DISPLAY TYPE: PSTN
 - 2.VIEW DIRECTION: 6 O'CLOCK
 - 3.POLARIZER TYPE: TRANSELECTIVE/POSITIVE
 - 4.DRIVER METHOD: 1/64 DUTY 1/9 BIAS
 - 5.LCD DRIVING VOLTAGE: 9.0V
 - 6.LOGIC SUPPLY VOLTAGE: 3.3V
 - 7.OPERATING TEMP: -20°C~+70°C
 - 8.STORAGE TEMP: -30°C~+80°C
 - 9.CONNECTOR TYPE: COG+PPC
 - 10.CONTROLLER/DRIVE IC: ST7865R
 - 11.BACKLIGHT:
 - 12.OTHER TOLERANCE: ±0.2mm

- DRIVER METHOD [WHITE:VLED=3.3±0.3V ILED=45mA]
 [RED:VLED=2.1±0.3V ILED=45mA]
 [GREEN:VLED=2.1±0.3V ILED=45mA]

NO.	CONTENT	DATE	DWN	CHK	APP
△A	NEW	2015.06.24			

AMEND	APPROVALS	DATE	PROJECTION	VERSION	UNIT: MM	NO. 1/1

SUNLIKE DISPLAY TECH., CORP.

