

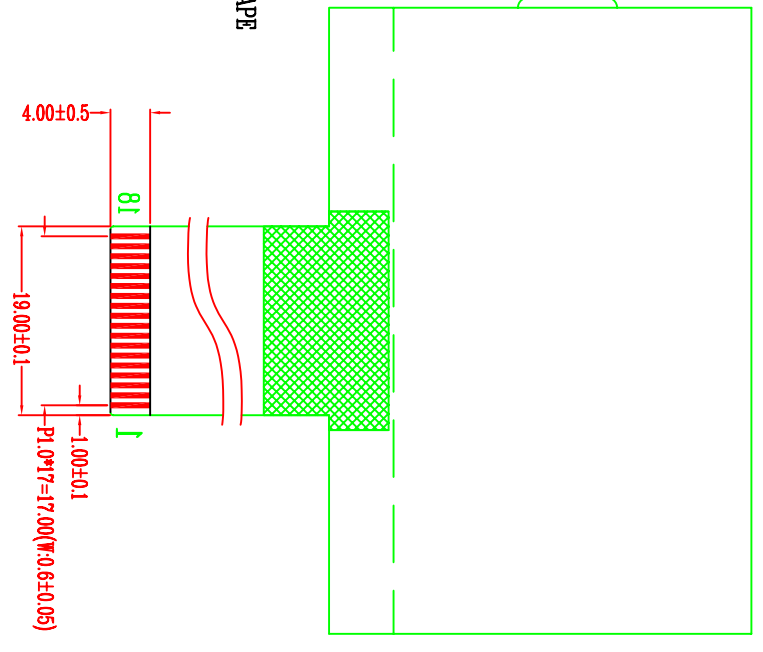
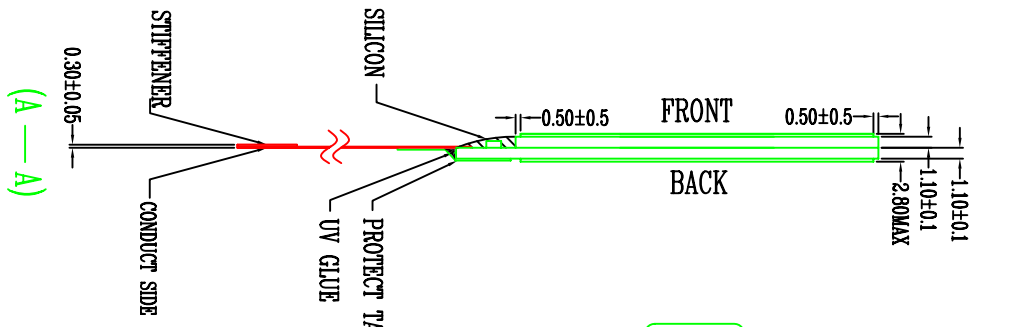


PIN FUNCTION

NO.	SYMBOL
1	VDD
2	VSS
3	VG
4	NC
5	NC
6	NC
7	NC
8	XV0
9	V0
10	NC
11	NC
12	NC
13	NC
14	D7(SI)
15	D6(SCL)
16	RS(AO)
17	/RES
18	/CSI

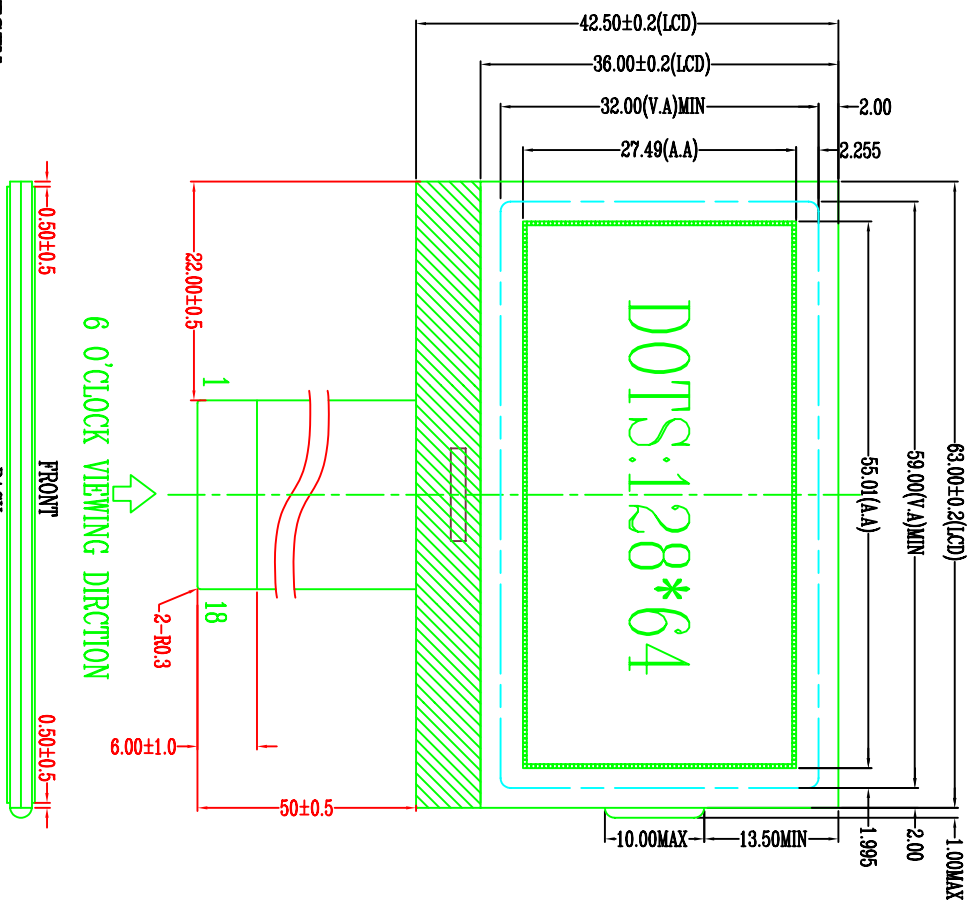

DOT DETAIL  
SCALE:15X

ROHS

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEW DIRECTION: 6 O'CLOCK
3. POLARIZER TYPE: TRANSPARENT/POSITIVE
4. DRIVER METHOD: 1/65 DUTY 1/9 BIAS
5. LCD DRIVING VOLTAGE: 9.0V
6. LOGIC SUPPLY VOLTAGE: 3.0V
7. OPERATING TEMP: -20° C~+70° C
8. STORAGE TEMP: -30° C~+80° C
9. CONTROLLER/DRIVE IC: ST7565P-G ST7567)
10. CONNECTOR TYPE: COG+FPC
11. OTHER TOLERANCE: ±0.2mm

NO.	AMEND	CONTENT	DATE	APP	CHK	DWN	PROJECTION	VERSION	A	UNIT: MM	NO. 1/1
△		NEW	20160407								

SUNLIKE DISPLAY TECH., CORP.

AMG128064L