


6800 时序接口

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
/CSI	/RST	A0	/WR	/RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD	VSS	VOU <sup>T</sup>	CAP4+	CAP3+	CAP1-	CAP1+	CAP2+	CAP2-	V1	V2	V3	V4	V0	NC

↺ 12 0'CLOCK VIEWING DIRECTION

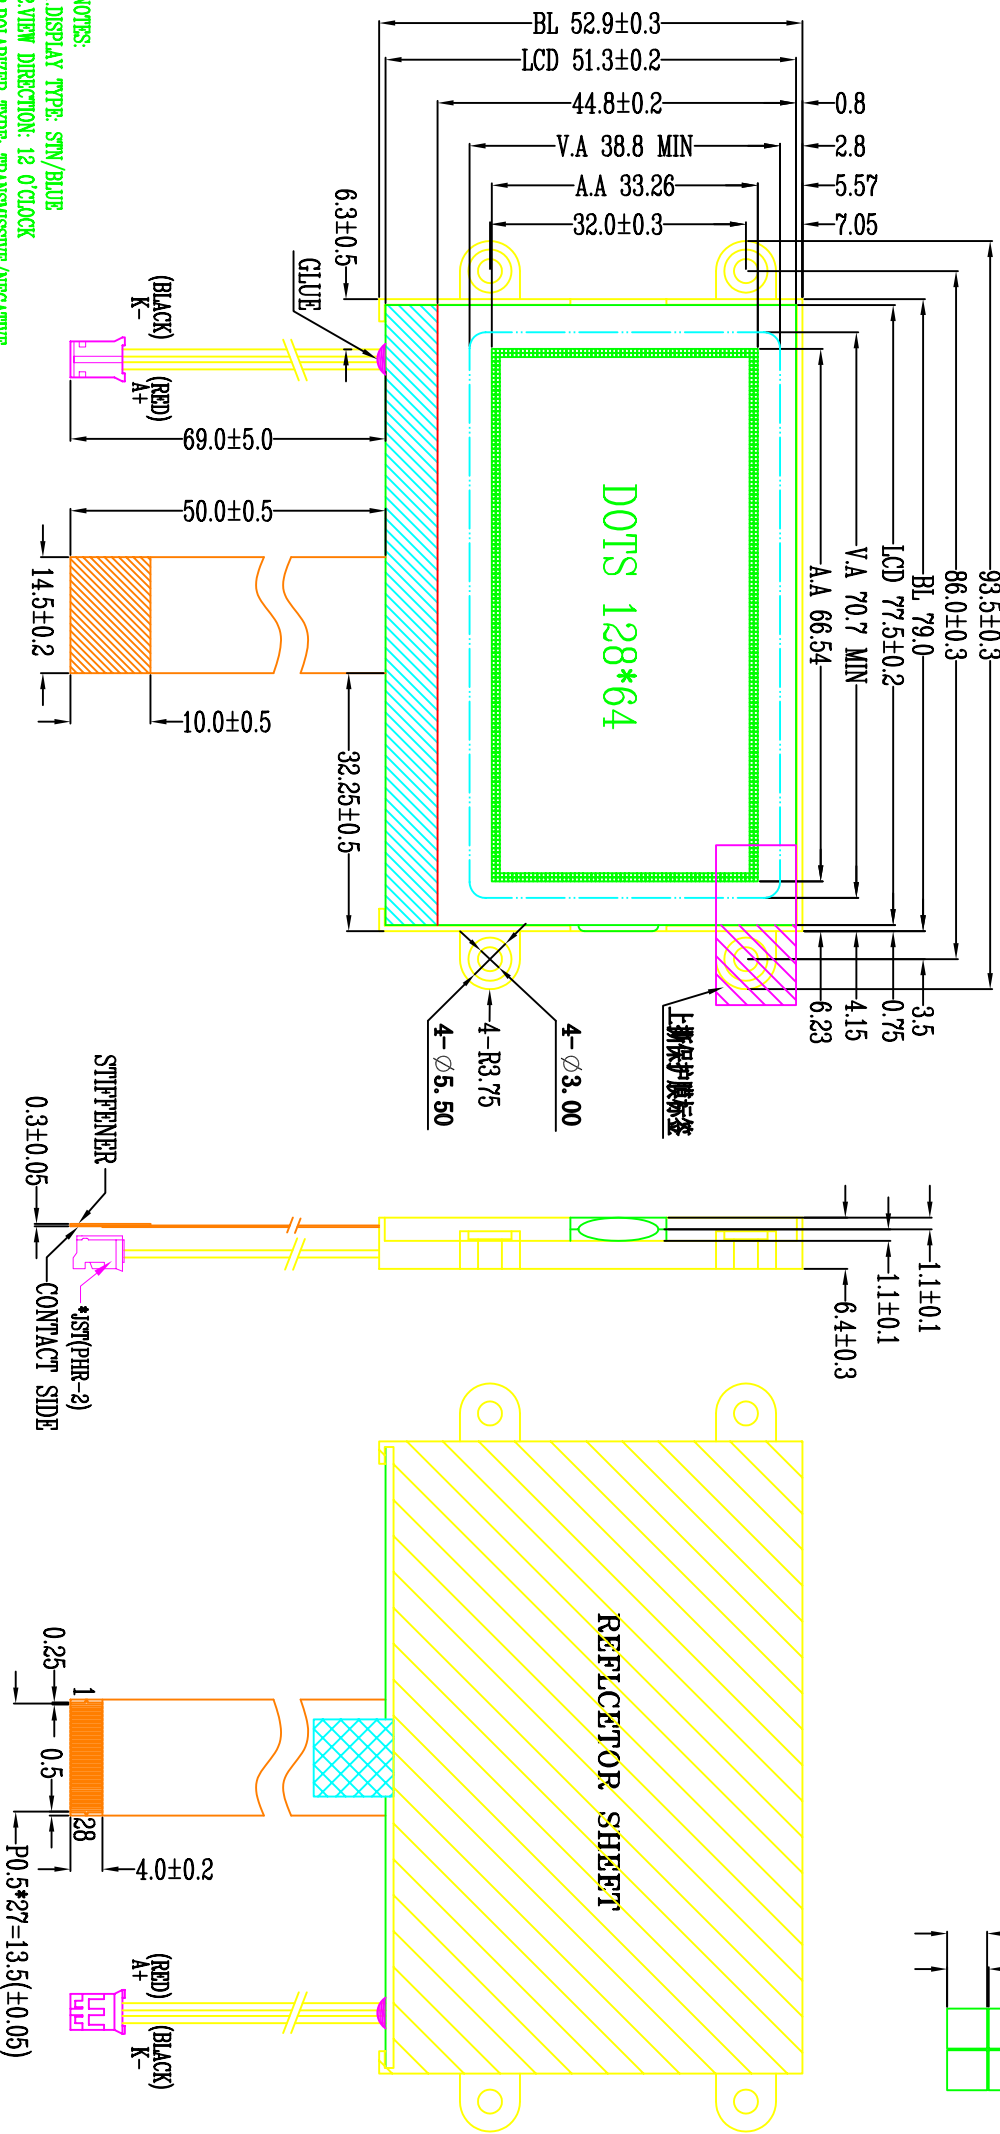

NOTES:

- 1.DISPLAY TYPE: STN/BLUE
- 2.VIEW DIRECTION: 12 0'CLOCK
- 3.POLARIZER TYPE: TRANSMISSIVE/NEGATIVE
- 4.DRIVER METHOD: 1/64 DUTY 1/9 BIAS
- 5.LCD DRIVING VOLTAGE: 10.0V
- 6.LOGIC SUPPLY VOLTAGE: 3.3V
- 7.OPERATING TEMP: -20°C~+70°C
- 8.STORAGE TEMP: -30°C~+80°C
- 9.CONNECTOR TYPE: COG+BL+PPC
- 10.CONTROLLER/DRIVE IC: NT7538
- 11.BACKLIGHT: WHITE
- DRIVER METHOD [V=3.0V, I=75ma]
- 12.OTHER TOLERANCE: ±0.2mm

AMEND		SUNLIKE DISPLAY TECH.,CORP.	
NO.	CONTENT	DATE	VERSION
A	NEW	2016.04.06	A
APPROVALS		DATE	AMG128064V
APP	CHK	PROJECTION	VERSION
	2016.04.06	16.04.13	A
DATE		UNIT: MM	NO.1/1