

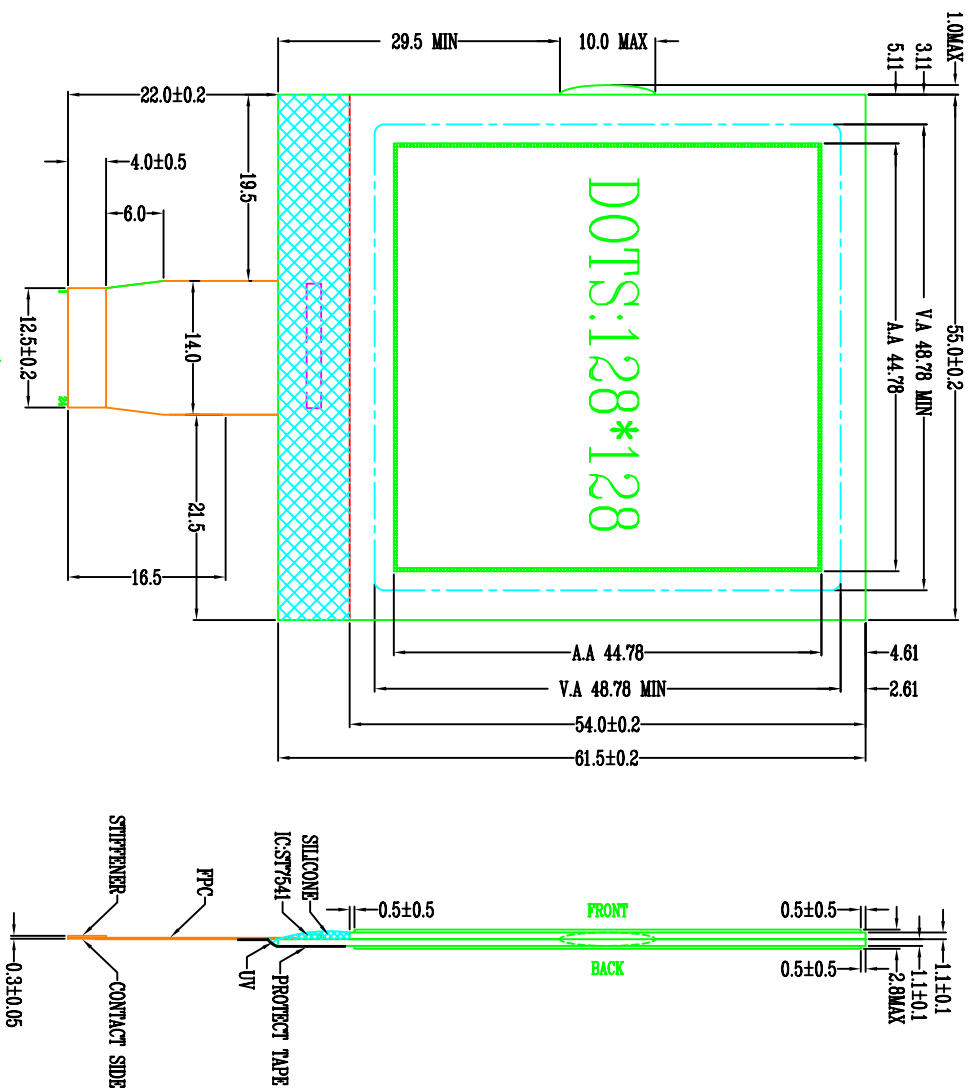



**PIN ASSIGNMENT:**

1	V0
2	V1
3	V2
4	V3
5	V4
6	INTRS
7	VOUT
8	VSS
9	VDD
10	BD7
11	BD6
12	BD5
13	BD4
14	BD3
15	BD2
16	BD1
17	BD0
18	E_RD
19	RW_WIR
20	A0
21	RST
22	CSB
23	PS1
24	NC

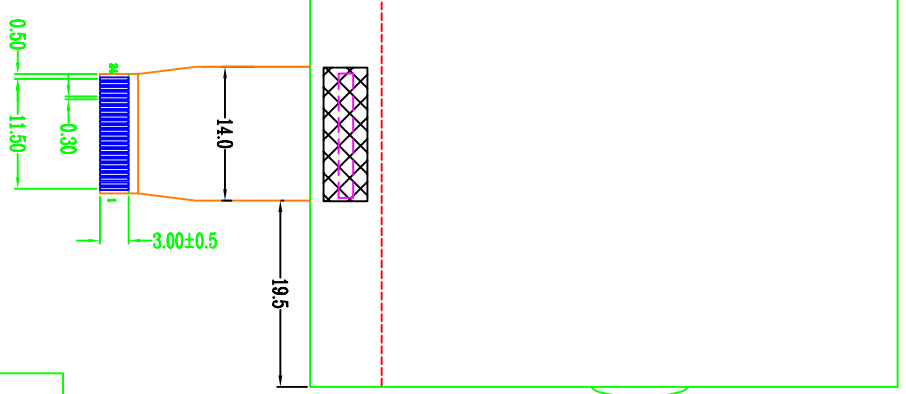

6 O'CLOCK VIEWING DIRECTION



- NOTES:**
- 1.DISPLAY TYPE: FSTN
  - 2.VIEW DIRECTION: 6 O'CLOCK
  - 3.POLARIZER TYPE: TRANSPARENTIVE/POSITIVE
  - 4.DRIVER METHOD: 1/128 DUTY 1/12 BIAS
  - 5.LCD DRIVING VOLTAGE: 12.9V
  - 6.LOGIC SUPPLY VOLTAGE: 3.0V
  - 7.OPERATING TEMP: -10°C~+60°C
  - 8.STORAGE TEMP: -20°C~+70°C
  - 9.CONNECTOR TYPE: COG+IPC
  - 10.CONTROLLER/DRIVE IC: ST7541

AMEND		SUNLIKE DISPLAY TECH. CORP.		LCM DRAWING	
NO.	CONTENT	DATE	DWN	APP	CHK
1	NEW	2015.12.28	DWN	Chenby Jiang	2015.12.28
AMEND		DATE		PROJECTION	
AMEND		DATE		VERSION	
AMEND		DATE		UNIT: MM	
AMEND		DATE		NO. 1/1	