

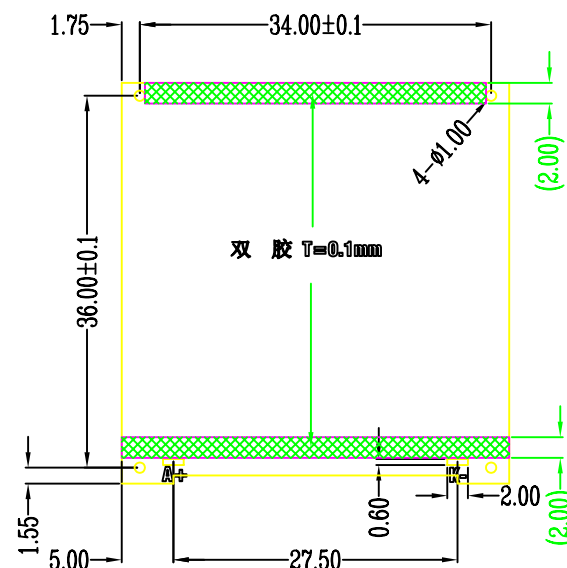
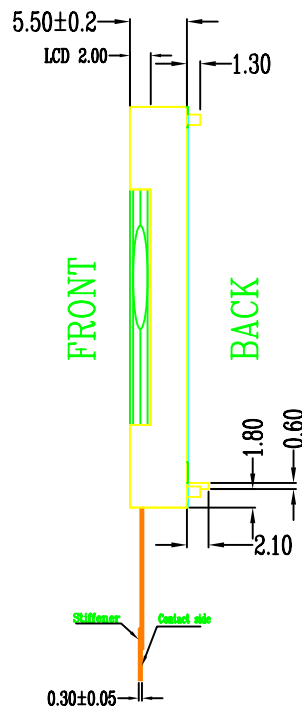
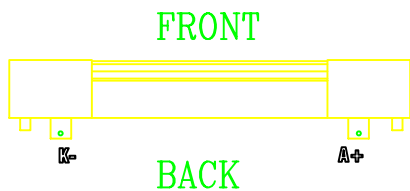


CUSTOMER APPROVED (ALL PAGE):

CUSTOMER REQUIREMENT:

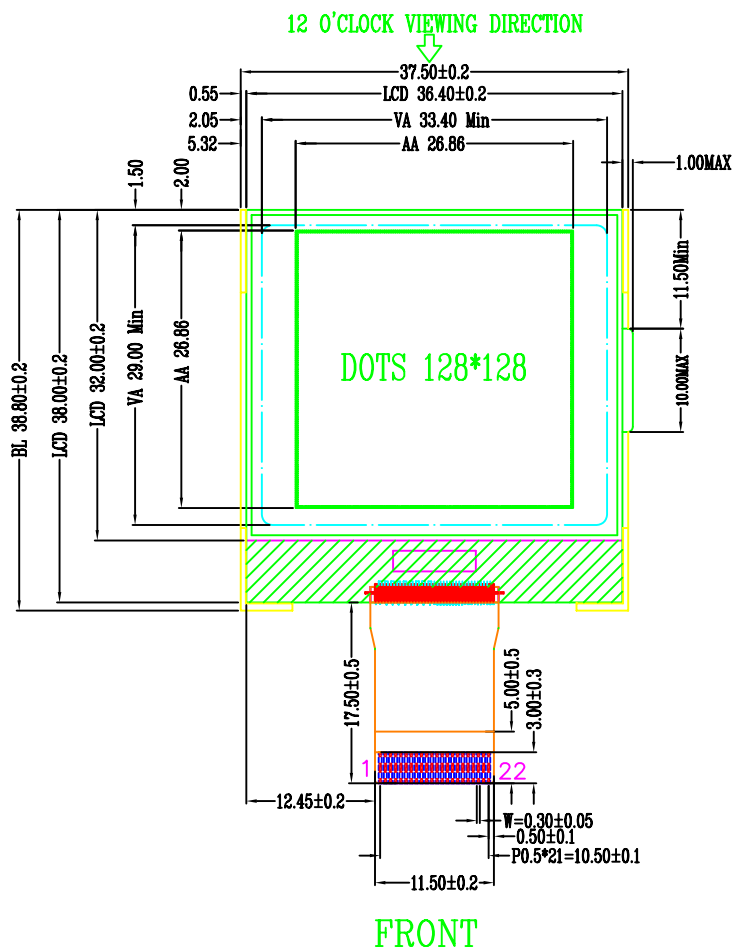

FFC PIN FUNCTION

NO.	SYMBOL
1	VEE
2	VPP
3	VG
4	VD1
5	XV0
6	V0
7	VM
8	VSS
9	VDD
10	D7
11	D6
12	D5
13	D4
14	D3
15	D2
16	D1
17	D0
18	E
19	RW
20	A0
21	RESET
22	CSB

NOTES:

- 1.DISPLAY TYPE: FSTN
- 2.VIEW DIRECTION: 12 O'CLOCK
- 3.POLARIZER TYPE: TRANSLLECTIVE/POSITIVE
- 4.DRIVER METHOD: 1/128 DUTY 1/12 BIAS
- 5.LCD DRIVING VOLTAGE: 12.5V
- 6.LOGIC SUPPLY VOLTAGE: 3.3V
- 7.OPERATING TEMP: -20°C~+70°C
- 8.STORAGE TEMP: -30°C~+80°C
- 9.CONNECTOR TYPE: COG+FPC
- 10.CONTROLLER/DRIVE IC: ST7571 6800 Interface
- 11.BACKLIGHT: WHITE 2-LED  
DRIVER METHOD [Vf=3.2V If=40mA]
- 12.OTHER TOLERANCE: ±0.2mm

AMEND		SUNLIKE DISPLAY TECH. CORP.								
		APPROVALS		DATE		AMG128128B				
		APP								
△	NEW	2016.06.25	CHK							
NO.	CONTENT	DATE	DWN	<i>Nancy</i>	16.06.25	PROJECTION	VERSION	A	UNIT: MM	NO.1/1