
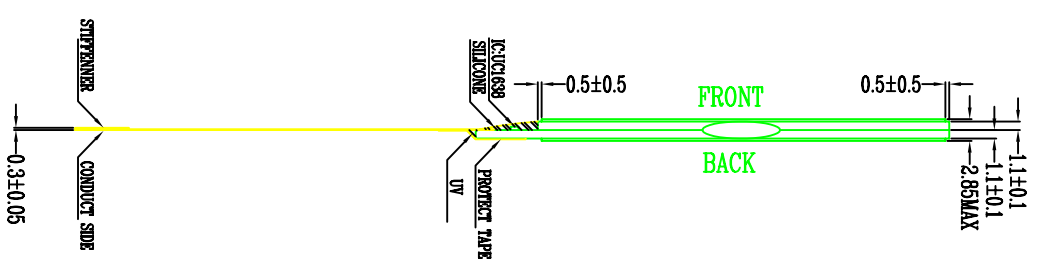


**DOT DETAIL**  
SCALE:20:1

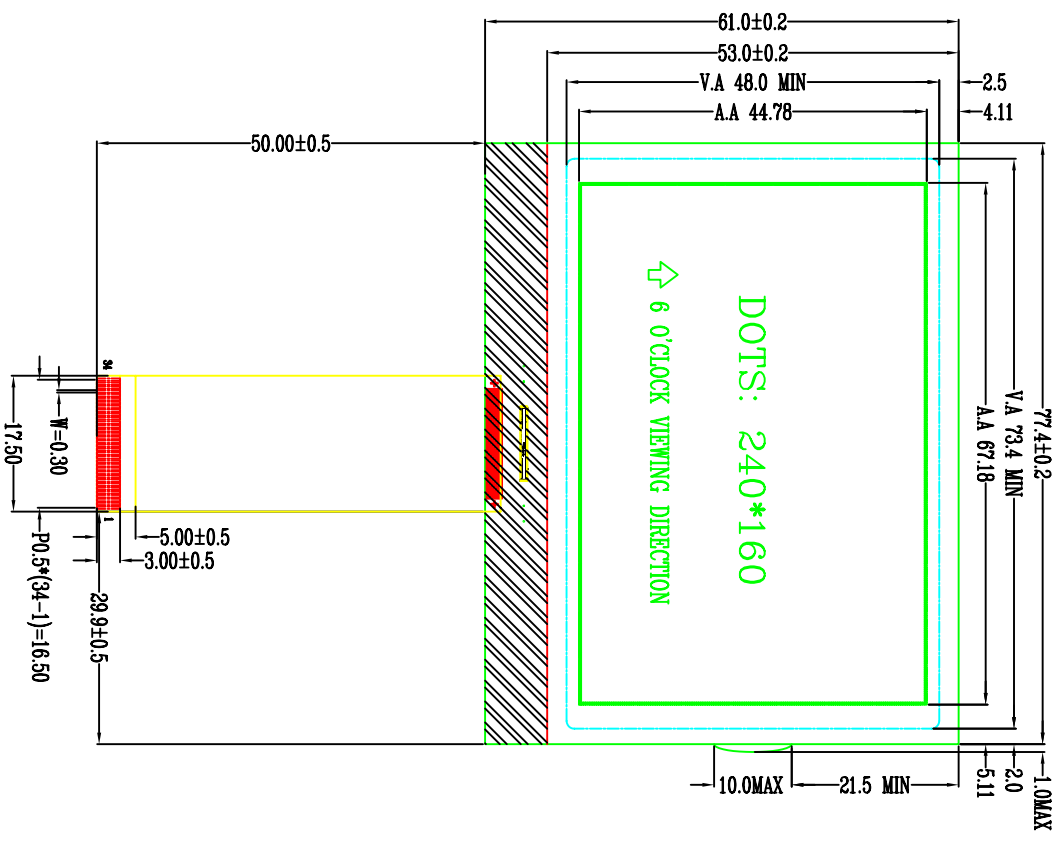

PIN	SYMBOL	PIN	SYMBOL
1	NC	18	POR
2	GND	19	VSS
3	D7	20	VSS
4	D6	21	VDD
5	D5	22	VDD
6	D4	23	VDD
7	D3	24	VLCD
8	D2	25	VA0-
9	D1	26	VA1-
10	D0	27	VA1+
11	RST	28	VA0+
12	CS	29	VB0-
13	CD	30	VB1-
14	WR0	31	VB1+
15	WR1	32	VB0+
16	BM1	33	GND
17	BM0	34	NC

- NOTES:
- 1.DISPLAY TYPE: FSM
  - 2.VIEW DIRECTION: 6 O'CLOCK
  - 3.POLARIZER TYPE: TRANSPARENTIVE/POSITIVE
  - 4.DRIVER METHOD: 1/160 DUTY 1/12 BIAS
  - 5.LCD DRIVING VOLTAGE: 15.0V
  - 6.LOGIC SUPPLY VOLTAGE: 3.3V
  - 7.OPERATING TEMP: -20°C~+70°C
  - 8.STORAGE TEMP: -30°C~+80°C
  - 9.CONNECTOR TYPE: COG+PPG
  - 10.CONTROLLER/DRIVE IC: UC1638C

AMEND		DATE		DATE		PROJECTION		VERSION		UNIT: MM		NO. 1/1	
NO.	AMEND	DATE	DATE	PROJECTION	VERSION	UNIT: MM	NO. 1/1						
1	NEW	2016.11.02	16.11.02	AMG240160B	A	MM	1/1						
CONTENT		DATE	DATE	PROJECTION	VERSION	UNIT: MM	NO. 1/1						
NEW		2016.11.02	16.11.02	AMG240160B	A	MM	1/1						

**SUNLIKE DISPLAY TECH., CORP.**

APP	DATE	PROJECTION	VERSION	UNIT: MM	NO. 1/1
APP	DATE	PROJECTION	VERSION	UNIT: MM	NO. 1/1
CHK					
DWN					