CUSTOMER APPROVED (ALL PAGE):		CUSTOMER REQUIREMENT:	

PIN ASSIGNMENT:

PIN	SYMBOL
1	ESD
2	CSB
3	RSTB
4	A0
5	RWR
6	ERD
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7
15	VDD
16	VSS
17	V0
18	XV0
19	VG
20	C86
21	PSB
22	ESD



LCD LAYOUT

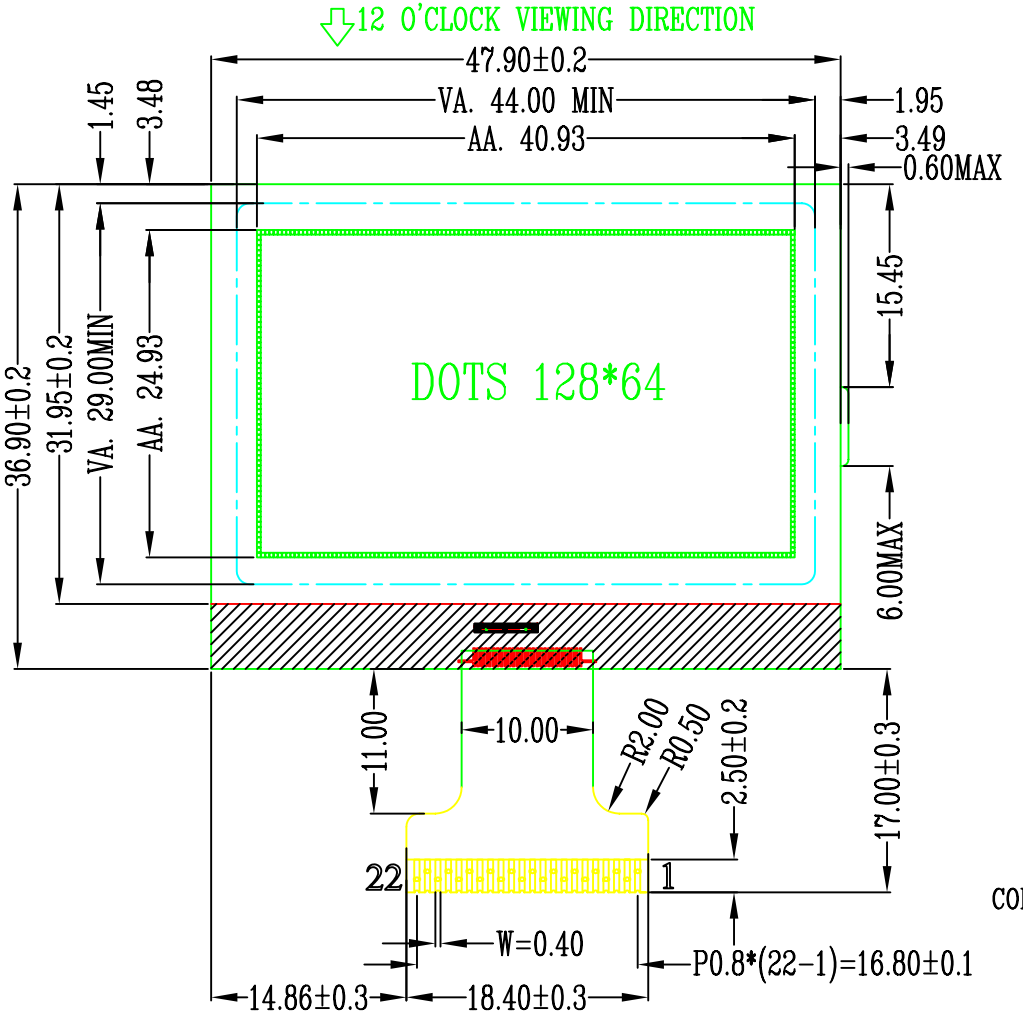

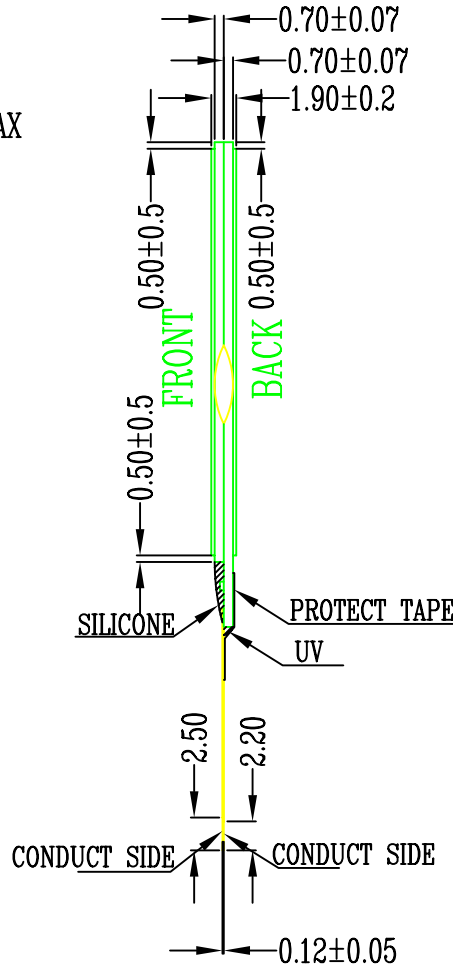

NOTES:

1.DISPLAY TYPE: STN/GRAY
2.VIEW DIRECTION: 12 O'CLOCK
3.POLARIZER TYPE: TRANSFLECTIVE/POSTIVE
4.DRIVER METHOD: 1/65 DUTY 1/9 BIAS
5.LCD DRIVING VOLTAGE: 9.0V
6.LOGIC SUPPLY VOLTAGE:VDD=3.3V
7.OPERATING TEMP: -20°C~+70°C
8.STORAGE TEMP: -30°C~+80°C
9.CONNECTOR TYPE: COG+FPC
10.CONTROLLER/DRIVE IC: ST7567-G4
11.OTHER TOLERANCE: ±0.2mm

NO.	CONTENT	DATE
	AMEND	
A	NEW	2016.09.28

SUNLIKE DISPLAY TECH.,CORP.

APPROVALS		DATE
APP		
CHK		
DWN	Nancy	16.09.27

PROJECTION | AMG128064E | VERSION | A | UNIT: MM | NO.1/1