




PIN	SYMBOL
1	VSS
2	VR
3	V0
4	V1
5	V2
6	V3
7	V4
8	CAP2N
9	CAP2P
10	CAP1P
11	CAP1N
12	CAP3P
13	VOU+
14	VSS
15	VDD
16	DB7
17	DB6
18	/RD
19	/WR
20	A0
21	/RBS
22	/CS1

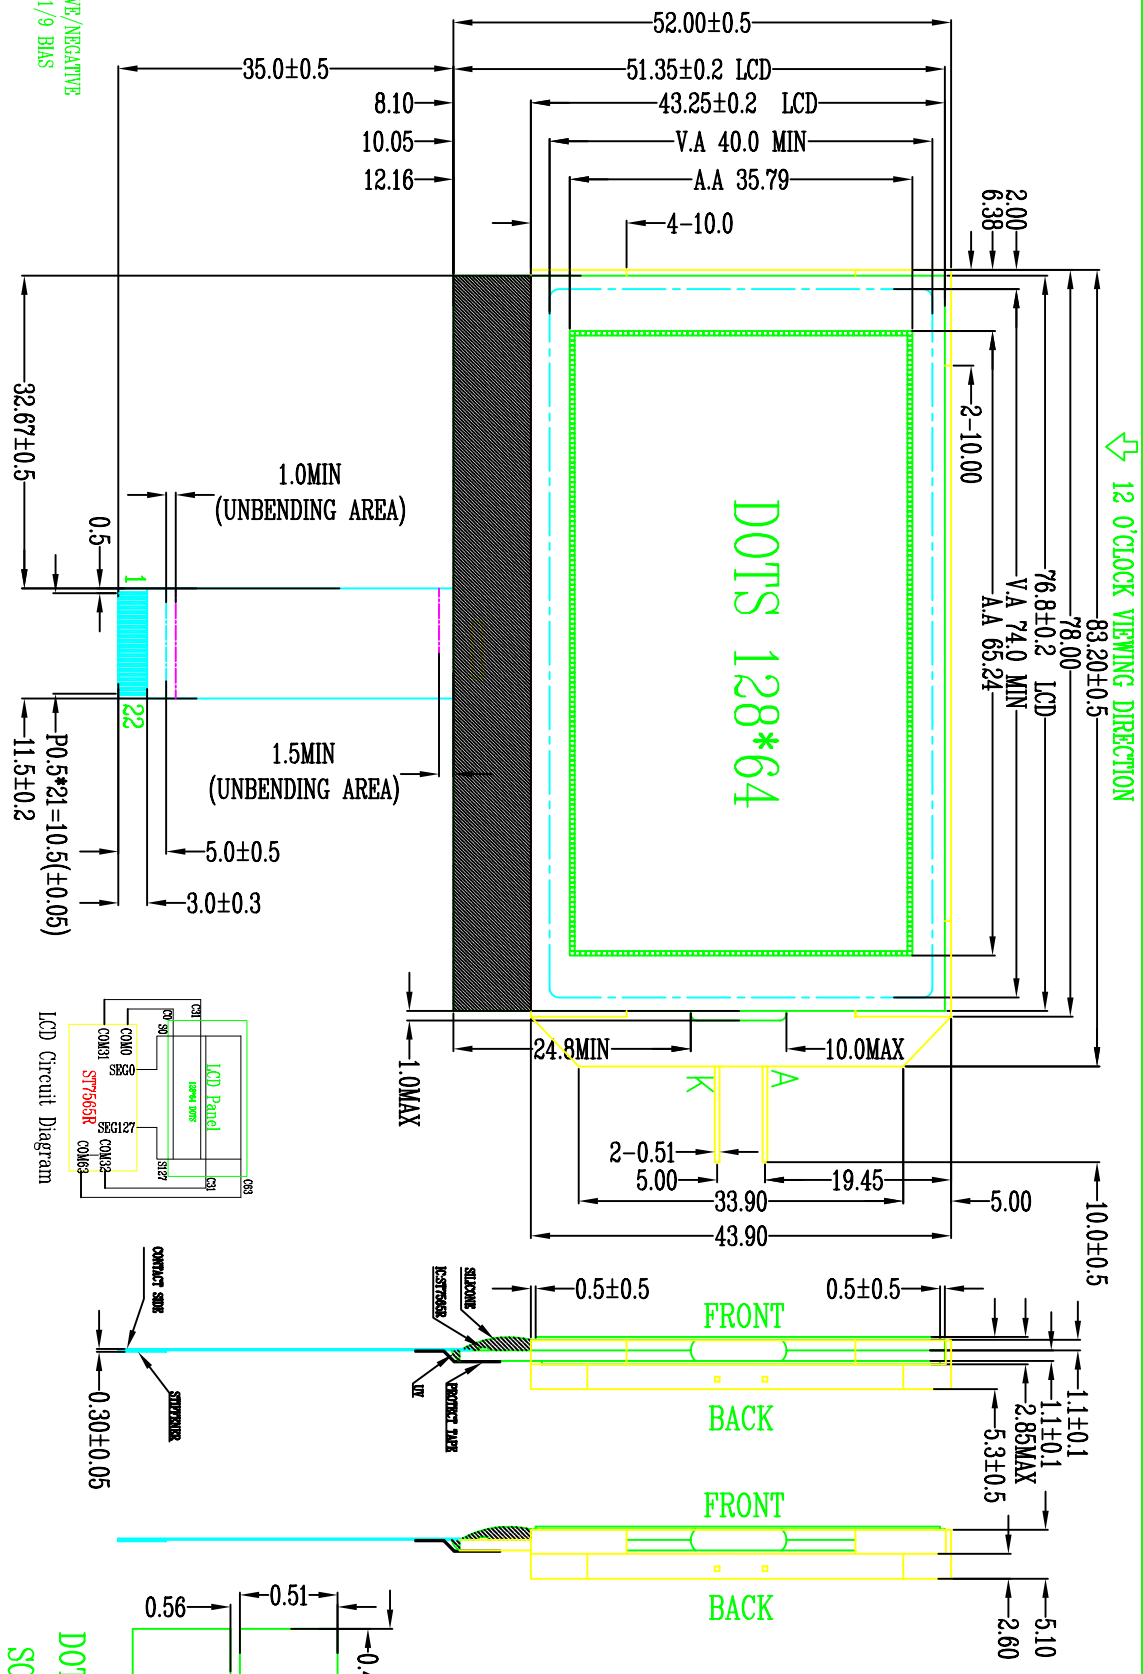

DOTS DETAIL
SCALE 20:1



- NOTES:
- 1.DISPLAY TYPE: STN/BLUE
 - 2.VIEW DIRECTION: 12 O'CLOCK
 - 3.POLARIZER TYPE: TRANSMISSIVE/NEGATIVE
 - 4.DRIVER METHOD: 1/65 DUTY 1/9 BIAS
 - 5.LCD DRIVING VOLTAGE: 9.0V
 - 6.LOGIC SUPPLY VOLTAGE: 3.0V
 - 7.OPERATING TEMP: -20°C~+70°C
 - 8.STORAGE TEMP: -30°C~+80°C
 - 9.CONNECTOR TYPE: COG+PPC+B/L
 - 10.CONTROLLER/DRIVE IC: ST7565R
 - 11.BACKLIGHT: 3 WHITE LEDs, VBI=3.2±0.2V, If=45mA
(Constant Current)
 - 12.OTHER TOLERANCE: ±0.2mm
 - 13.Unspecified diameter: C0.5



NO.	CONTENT	DATE	CHK	DWN	PROJECTION	VERSION	A	UNIT:MM	NO.1/1
△	NEW	2015.11.10	CHK	DWN	15.11.10				
SUNLIKE DISPLAY TECH.,CORP.									
AMEND			APPROVALS		DATE	AMG128064U			
			App						