

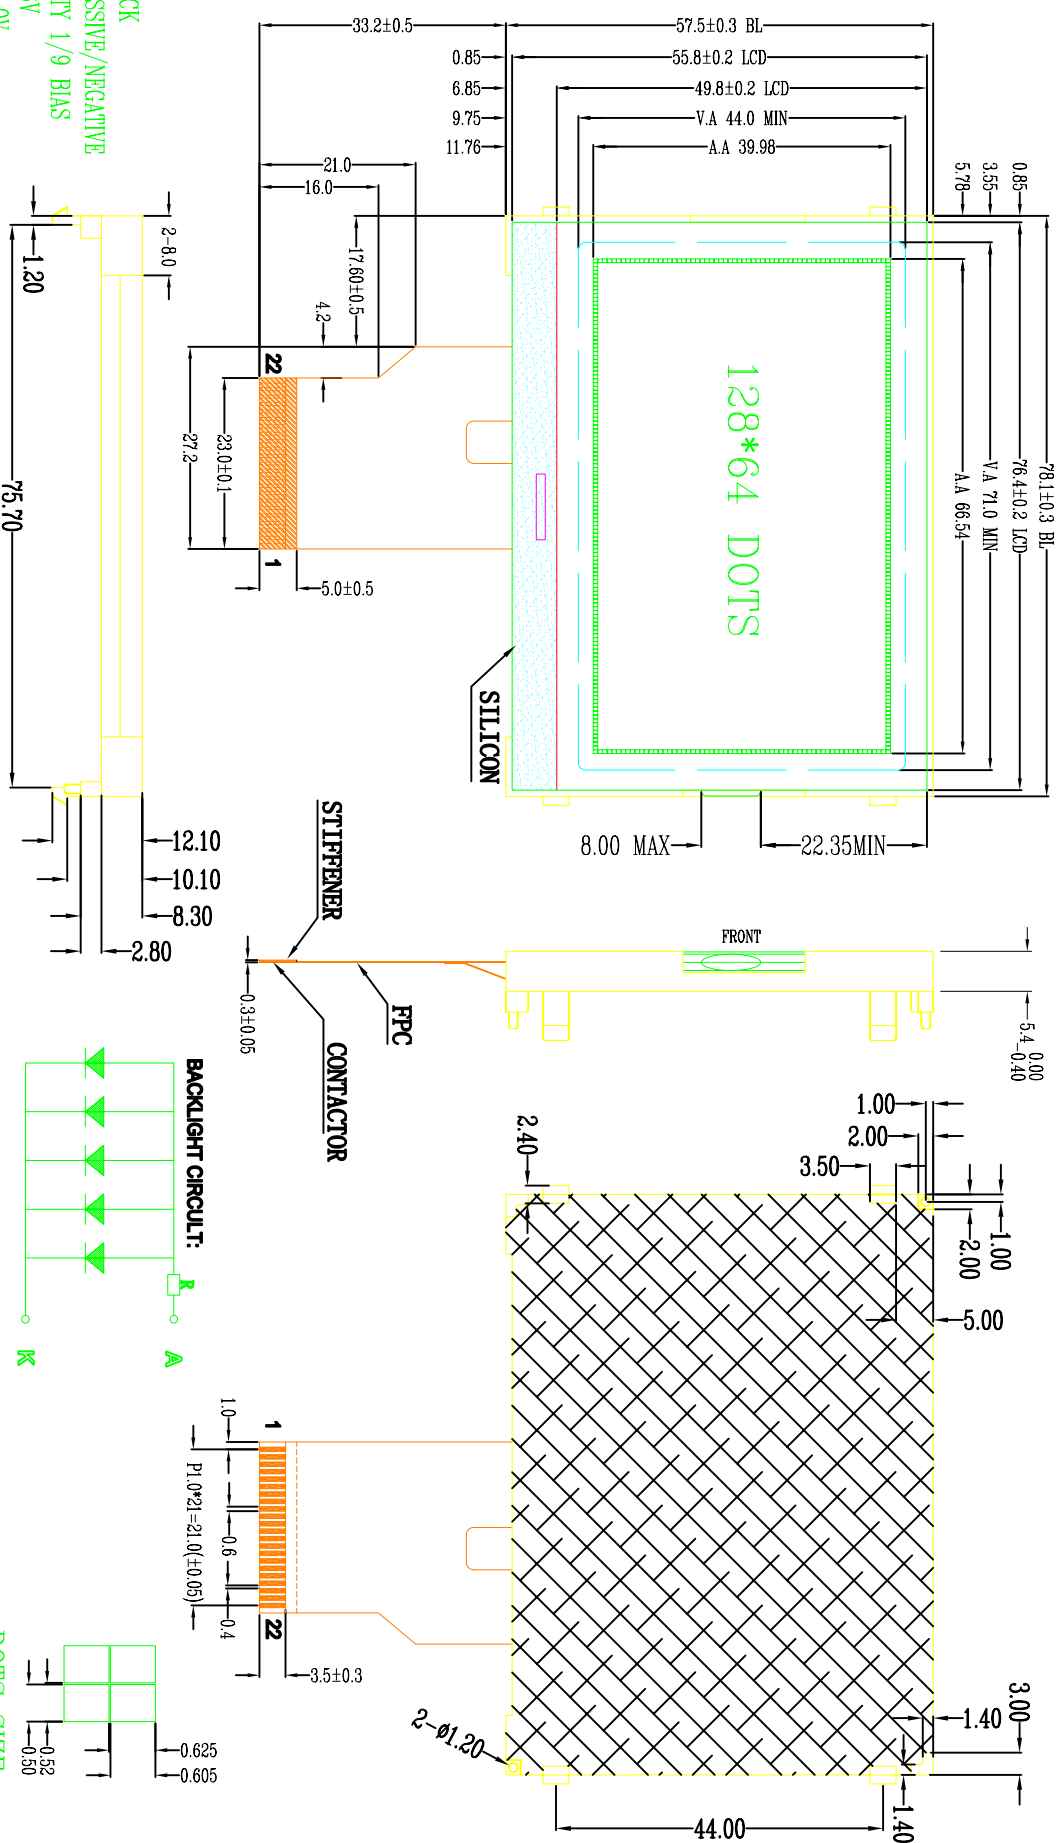


PIN DESCRIPTION:	
Pin	Name
1	/CS
2	RES
3	A0
4	SCL
5	SI
6	VDD
7	VSS
8	VOUT
9	C3+
10	C1-
11	C1+
12	C2+
13	C2-
14	V4
15	V3
16	V2
17	V1
18	V0
19	NC
20	A
21	K
22	NC

12 0'CLOCK VIEWING DIRECTION

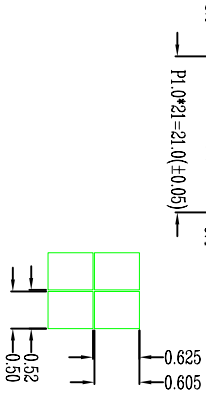

- NOTES:
- 1.DISPLAY TYPE: STN/BLUE
 - 2.VIEW DIRECTION: 12 0'CLOCK
 - 3.POLARIZER TYPE: TRANSMISSIVE/NEGATIVE
 - 4.DRIVER METHOD: 1/64 DUTY 1/9 BIAS
 - 5.LCD DRIVING VOLTAGE: 8.6V
 - 6.LOGIC SUPPLY VOLTAGE: 3.0V
 - 7.OPERATING TEMP: -20°C~+70°C
 - 8.STORAGE TEMP: -30°C~+80°C
 - 9.CONNECTOR TYPE: LCD+FPC+BL
 - 10.CONTROLLER/DRIVE IC: ST7565P
 - 11.BACKLIGHT: WHITE
 - 12.OTHER TOLERANCE: ±0.2mm



SUNLIKE DISPLAY TECH.,CORP.

APPROVALS

DATE

PROJECTION

VERSION

DRIVER METHOD [VLBD=3.0V, ILBD=75mA]

NO.	CONTENT
A	NEW

DATE

CHK

DWN

PROJECTION

VERSION

UNIT: MM NO. 1/1