CUSTOMER APPROVED (ALL PAGE):		CUSTOMER REQUIREMENT:	

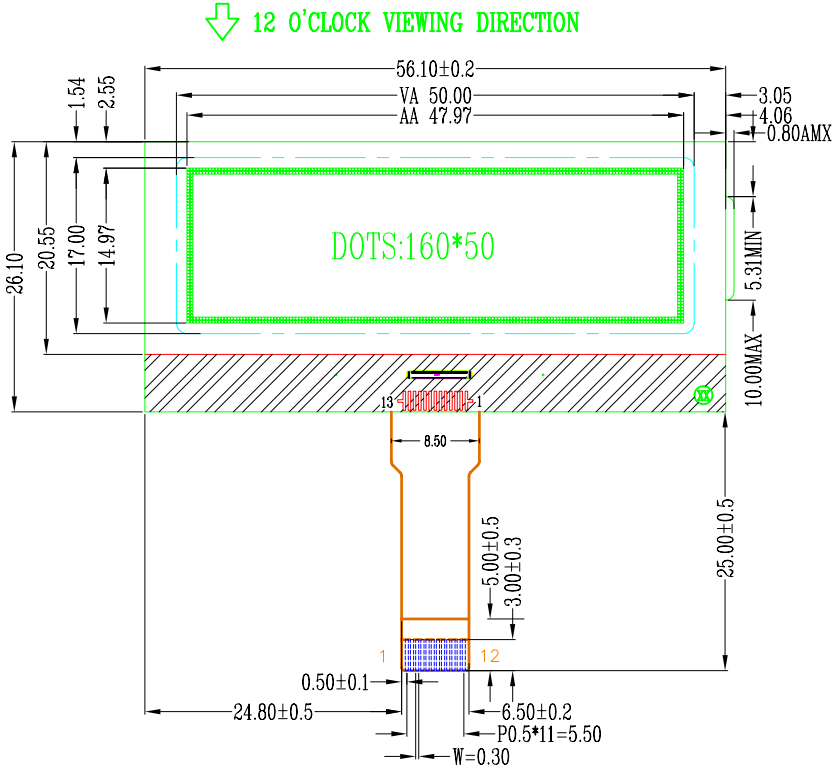

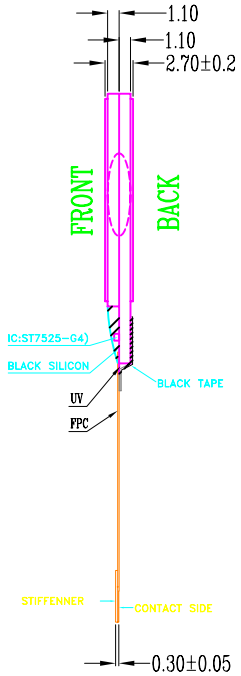



DOTS DETAIL
SCALE:10:1

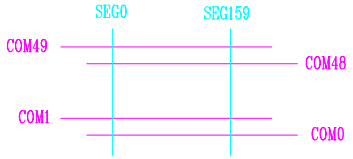

LOGIC DIAGRAM

PIN	SYMBOL
1	ESD
2	XV0
3	V0
4	VDD
5	VSS
6	CS
7	A0
8	RST
9	SCL
10	SDA
11	ESD
12	NC

NOTES:
1.DISPLAY TYPE: FSTN
2.VIEW DIRECTION: 12 O'CLOCK
3.POLARIZER TYPE: TRANSFLECTIVE/POSITIVE
4.DRIVER METHOD: 1/50 DUTY 1/9 BIAS
5.LCD DRIVING VOLTAGE: 9.0V
6.LOGIC SUPPLY VOLTAGE: 3.0V
7.OPERATING TEMP: -10°C~+60°C
8.STORAGE TEMP: -20°C~+70°C
9.CONNECTOR TYPE: COG+FPC
10.CONTROLLER/DRIVE IC: ST7525-G4
11.OTHER TOLERANCE: ±0.2mm

E			SUNLIKE DISPLAY TECH.,CORP.						
D									
C			APPROVALS		DATE		AMG160050A		
B			APP						
A	NEW	2016.12.15	CHK						
NO.	CONTENT	DATE	DWN	Spring	17.03.24	PROJECTION	VERSION	A	UNIT: MM	NO.1/1