

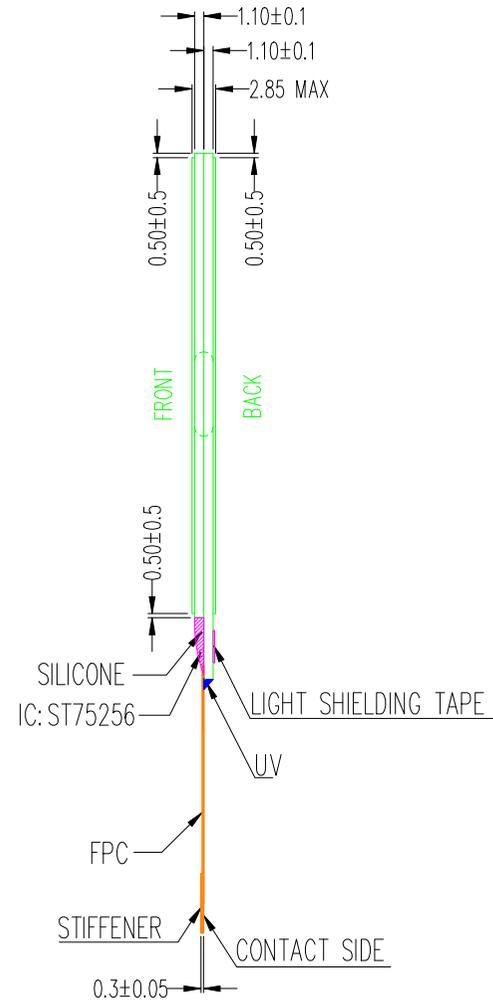


CUSTOMER APPROVED (ALL PAGE):

CUSTOMER REQUIREMENT:

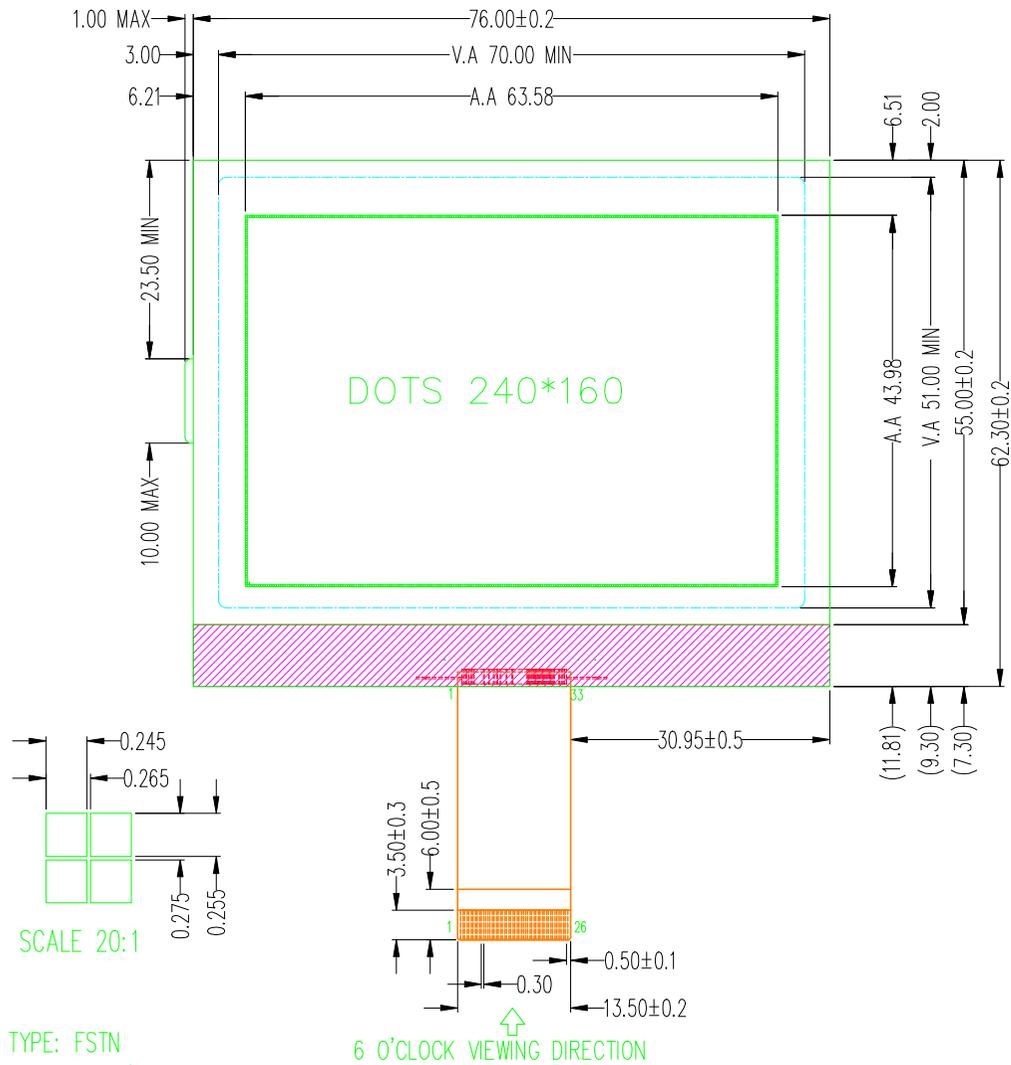

PIN	SYMBOL	PIN	SYMBOL
1	ESD	14	WR
2	VG	15	RETB
3	VO	16	D0
4	XV0	17	D1
5	C1P	18	D2
6	C1N	19	D3
7	VDD	20	D4
8	VSS	21	D5
9	IF1	22	D6
10	IF0	23	D7
11	CSB	24	EXTB
12	A0	25	VPP
13	RD	26	ESD

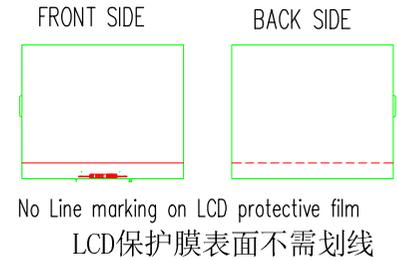

NOTES:

- 1.DISPLAY TYPE: FSTN
- 2.VIEW DIRECTION: 6 O'CLOCK
- 3.POLARIZER TYPE: TRANSFLECTIVE/POSITIVE
- 4.DRIVER METHOD: 1/160 DUTY 1/12 BIAS
- 5.LCD DRIVING VOLTAGE: 15.0V
- 6.LOGIC SUPPLY VOLTAGE: 3.3V
- 7.OPERATING TEMP: -20°C~+70°C
- 8.STORAGE TEMP: -30°C~+80°C
- 9.CONNECTOR TYPE: COG+FPC
- 10.CONTROLLER/DRIVE IC: ST75256

AMEND		SUNLIKE DISPLAY TECH.,CORP.			
		APPROVALS		DATE	 AMG240160C
		APP			
		CHK			
△	NEW	2019.03.27			
NO.	CONTENT	DATE	DWN	19.03.27	PROJECTION
				VERSION	A
				UNIT: MM	NO.1/1