


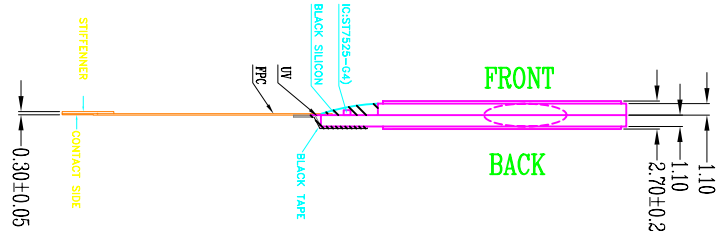


↗ 12 O'CLOCK VIEWING DIRECTION

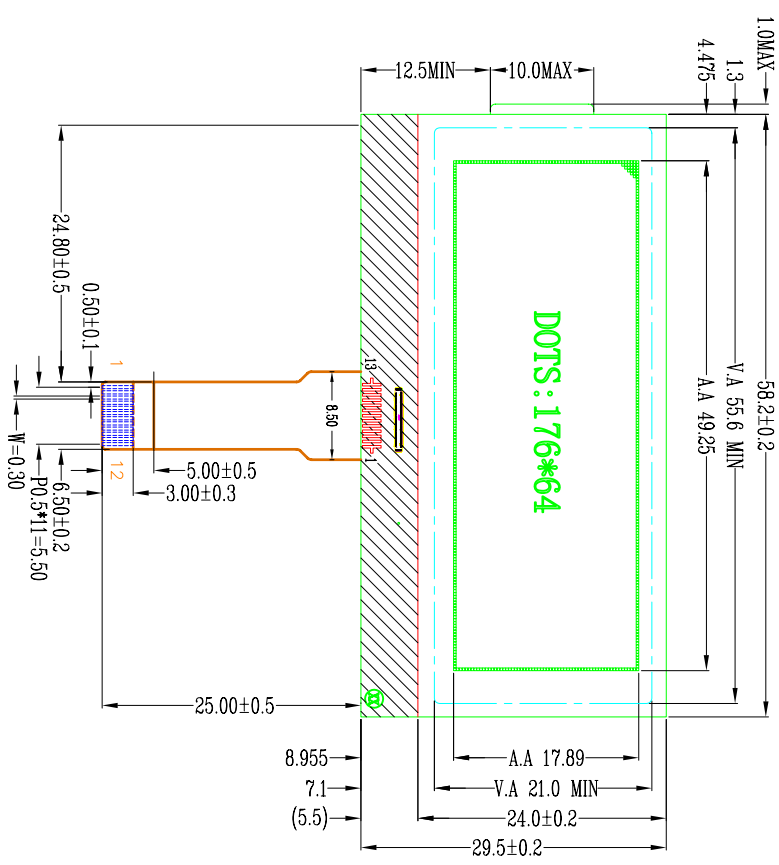

DOTS DETAIL
SCALE:10:1

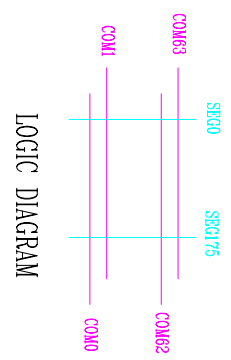

PIN	SYMBOL
1	ESD
2	XV0
3	V0
4	VDD
5	VSS
6	CS
7	A0
8	RST
9	SCL
10	SDA
11	ESD
12	NC

- NOTES:
- 1.DISPLAY TYPE: FSTN
 - 2.VIEW DIRECTION: 12 O'CLOCK
 - 3.POLARIZER TYPE: TRANSELECTIVE/POSITIVE
 - 4.DRIVER METHOD: 1/64 DUTY 1/9 BIAS
 - 5.ICD DRIVING VOLTAGE: 10.0V
 - 6.LOGIC SUPPLY VOLTAGE: 3.0V
 - 7.OPERATING TEMP: -10°C~+60°C
 - 8.STORAGE TEMP: -20°C~+70°C
 - 9.CONNECTOR TYPE: COG+FPC
 - 10.CONTROLLER/DRIVE IC: ST7525-G4
 - 11.OTHER TOLERANCE: ±0.2mm

NO.	CONTENT	DATE	DWN	Spring	17.03.24	PROJECTION	VERSION	A	UNIT: MM	NO.1/1
△E							AMG176064A			
△D			APP							
△B	NEW	2016.12.15	CHK							
△A										

SUNLIKE DISPLAY TECH., CORP.

APPROVALS

DATE



AMG176064A