



Specification for Approval

Customer: _____

Model Name: _____

Supplier Approval			Customer approval
R&D Designed	R&D Approved	QC Approved	
<i>Peter</i>	<i>Peng Jun</i>		

Table of Contents

List	Description	Page No.
	Cover	1
	Revision Record	2
	Table of Contents	3
1	Scope	4
2	General Information	4
3	External Dimensions	5
4	Module Structure	6
5	Absolute Maximum Ratings	9
6	DC Characteristics	9
7	Timing Characteristics	10
8	Backlight Characteristics	12
9	Optical Characteristics	13
10	Reliability Test Conditions and Methods	15
11	Inspection Standard	16
12	Handling Precautions	20
13	Precaution for Use	21
14	Packing Method	21

1. Scope

This specification defines general provisions as well as inspection standards for TFT module supplied by AMSON electronics.

If the event of unforeseen problem or unspecified items may occur, naturally shall negotiate and agree to solution.

2. General Information

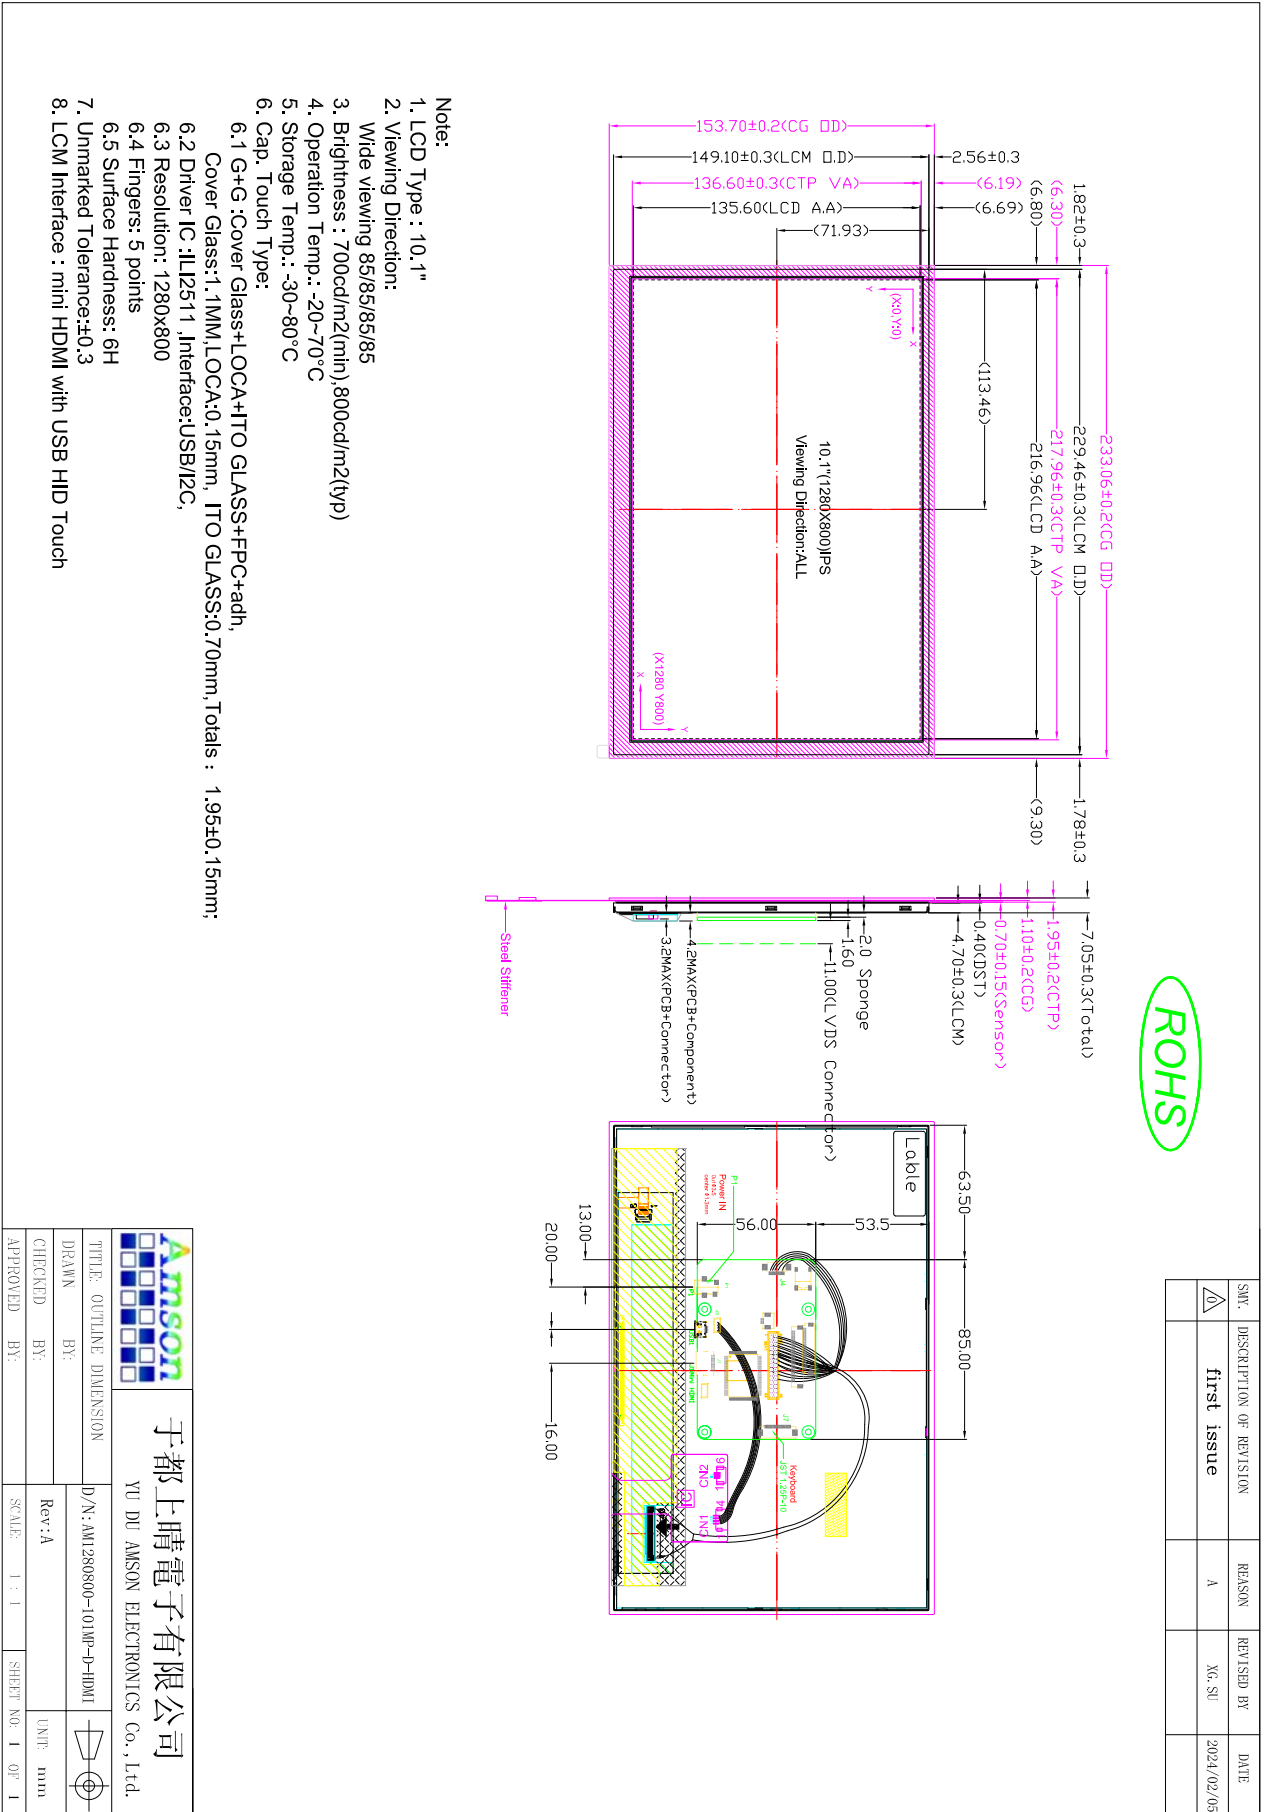
LCM

Item	Standard Values	Unit
LCD type	10.1" TFT	
Dot arrangement	1280×R.G.B.×800	dots
Color filter array	RGB vertical stripe	
Display mode	Normally Black	
Convertor IC	RTD2660H	
Module size	233.06(W)×153.7(H)×7.05(T)	mm
Active area	216.96(W)×135.60(H)	mm
Interface	HDMI	
Operating temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C

CTP


Item	Standard Values	Unit
Touch Panel Size	10.1"	
Touch type	Projective capacitive touch panel	
Input Method	Finger / 5 Points touch	
Output Interface	USB HID	
Hardness	≥6H	
IC	ILI2511	
Operating temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C

3. External Dimensions



4. Module Structure

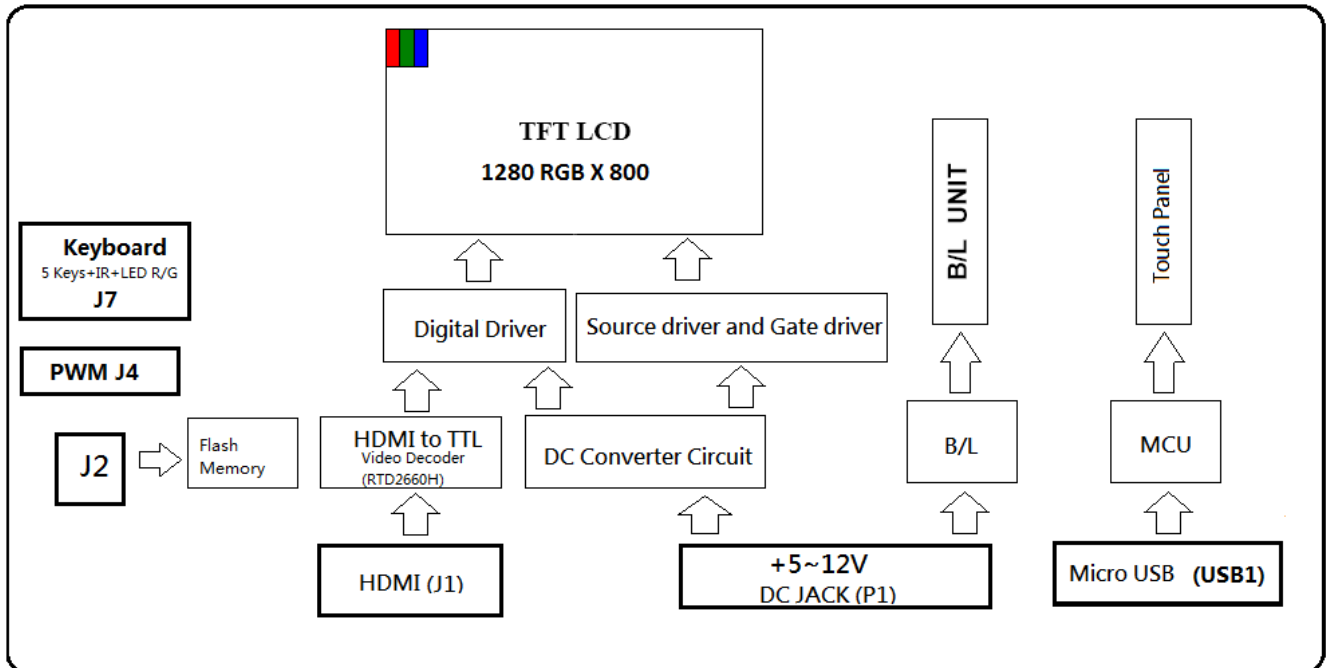4.1 Block Diagram



4.2 Interface Description

4.2.1 (J1:HDMI 1.3 / Mini HDMI Type C Interface)

Pin#	Name	Description
1	TX2 Shield	TMDS Data 2 Shield
2	TX2+	TMDS Data 2+
3	TX2-	TMDS Data 2-
4	TX1 Shield	TMDS Data 1 Shield
5	TX1+	TMDS Data 1+
6	TX1-	TMDS Data 1-
7	TX0 Shield	TMDS Data 0 Shield
8	TX0+	TMDS Data 0+
9	TX0-	TMDS Data 0-
10	TXC Shield	TMDS Clock Shield
11	TXC+	TMDS Clock+
12	TXC-	TMDS Clock-
13	DDC/CEC G	DDC/CEC GND
14	CEC	No Connection
15	SCL	Serial Clock for DDC
16	SDA	Serial Data for DDC
17	Reserved	No Connection
18	V5V	+5V Power
19	Hot Plug Detect	Hot Plug Detect

4.2.2 (P1:POWER DC JACK Interface)



Hold $\Phi 3.5$ mm / Center Pin $\Phi 1.3$ mm

Pin#	Name	Description
1	VIN	+5~ +12V Power
2	GND	Power Ground

4.2.3 (USB1 :Micro USB Capacitive Touch Panel Interface)

Pin#	Name	Description
1	VBUS	V _{Bus} 4.4V-5.25V
2	D-	Data-
3	D+	Data+
4	ID	No Connection
5	GND	Power Ground.

4.2.4 (J4 : Backlight Dimming Interface CN: JST P1.25*6 Pins or Equivalent)

Pin#	Name	Description	Note
1	VIN	V _{IN} 5V-12V	Equal P1 Power
2	VIN	V _{IN} 5V-12V	
3	EN OUT	NC	
4	PWM IN	Brightness Dimming	0-3.3V APWM 1K-10K
5	GND	Power Ground.	
6	GND	Power Ground.	

4.2.5 (J7 : Keyboard Interface CN: JST P1.25*10 Pins or Equivalent)

Pin	Pin Name	Description	Remark
1	VCC	Power supply output for Keyboard (+3.3V)	
2	GND	Ground	
3	IR	IR indicator	
4	POWER	Power Key	
5	MENU	Menu Key	
6	+	+ Key	
7	-	- Key	
8	SOURCE	Source Key	
9	R_LED	Red indicator	
10	G_LED	Green indicator	

5. Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Remark
Supply Voltage	VIN	-0.3	26	V	
Supply Voltage	VBUS	-0.3	6.0	V	

6. DC Characteristics

6.1 LCM Parameters


Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Power Voltage	VIN	4.5	12	15	V	
Power Voltage	VBUS	4.5	5.0	5.5	V	
Input logic high voltage	V _{IH}	0.7*3V3	-	3V3	V	
Input logic low voltage	V _{IL}	GND	-	0.3*3V3	V	
Output High Voltage	V _{OH}	3V3-0.4	-	3V3	V	
Output Low Voltage	V _{OL}	GND	-	GND+0.4	V	
Current for Power	I _{VIN}	-	800	1000	mA	VIN=12V
Current for Power	I _{VBUS}	-	200	500	mA	VBUS=5.0V

6.2 CTP Parameters

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Input logic high voltage	V _{IH}	0.7* 3V3	-	3V3	V	
Input logic low voltage	V _{IL}	-0.3	-	0.3* 3V3	V	
Output High Voltage	V _{OH}	0.7* 3V3	-	V3V	V	
Output Low Voltage	V _{OL}	GND	-	0.3* 3V3	V	

7. Timing Characteristics

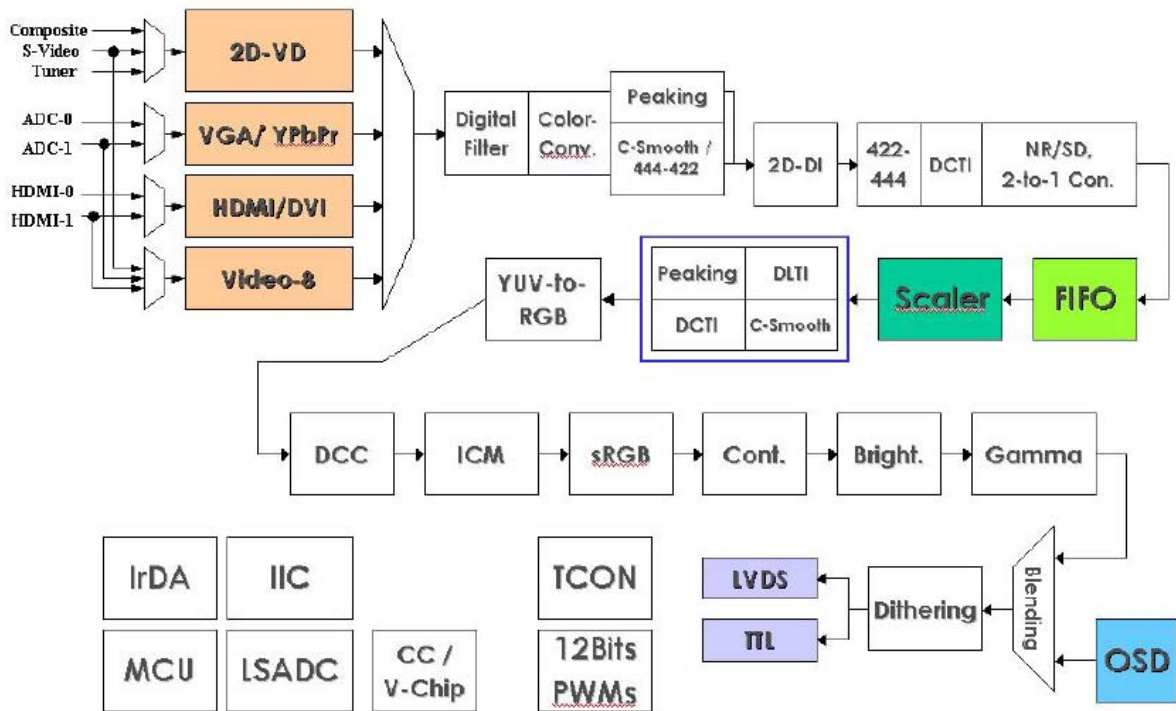7.1 Chip Data Path Block Diagram



7.2 Electric characteristics

DC Characteristics

Table 1 Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
Voltage on Input (5V tolerant)	V_{IN}	-1		5	V
Electrostatic Discharge	V_{ESD}			±2.5	kV
Latch-Up	I_{LA}			±100	mA
Ambient Operating Temperature	T_A	0		70	°C
Storage temperature (plastic)	T_{STG}	-55		125	°C
Thermal Resistance (Junction to Air)	θ_{JA}			25	°C/W
Junction Acceptable Temperature	T_j			125	°C

Table 2 DC Characteristics/Operating Condition

(0°C<TA<70°C)

【Power consumption : Embedded MCU】

Dot-pattern(check_11).

【1】 VGA-in: 1600x1200/75Hz , display to 1680x1050/75Hz , DCLK=170MHz.

Pattern Generator : 『 Chroma 2227 』 ; Pattern Name : 『 Dot 』 pattern

【2】 HDMI-in: 1600x1200/60Hz , display to 1680x1050/60Hz.

Pattern Generator : 『 QunatumData 882 』 ; Pattern Name : 『 Check11 』 (256 gray scale)

【3】 Video Decoder-in : DVD-player ; AV-in ; display to 1680x1050

Power Name	Voltage	Operating(mA)	Power saving(mA)	Power down(mA)
VCCK(core)(VGA)	1.8V	438	14.9	5.9
VCCK(core)(HDMI)	1.8V	455	8.5	6.1
VCCK(core)(Video Decoder)	1.8V	232	8.6	6.1
ADC_VDD	1.8V	123	0.1	0.1
TMDS_VDD	3.3V	173	19.9	19.9
VADC_VDD	3.3V	65.6	0.1	0.1
PVCC(LVDS)	3.3V	78.5	2.5	2.5
PVCC(TTL)	3.3V	34.1	12.8	12.8

7.3 Timing Table

Parameter	Symbol	Min.	Typ	Max.	Unit
DCLK frequency @Frame rate=60Hz	F _{DCLK}	66.3	72.4	78.9	MHz
HSYNC period time	T _H	1380	1440	1500	DCLK
Horizontal display area	T _{HD}	1280			DCLK
HSYNC period width	T _{HPW}	2	-	40	DCLK
HSYNC back porch (with pulse width)	T _{HBP}	88	88	88	DCLK
HSYNC front porch	T _{HFP}	12	72	132	DCLK
VSYNC period time	T _V	824	838	872	H
Vertical display area	T _{VD}	800			H
VSYNC period width	T _{VPW}	2	-	20	H
VSYNC back porch (with pulse width)	T _{VBP}	23	23	23	H
VSYNC front porch	T _{VFP}	1	15	49	H

8. Backlight Characteristic


Item	Symbol	Min	Typ	Max	Unit	Remark
Luminous Intensity for LCM and TP	-	700	800	-	cd/m ²	VIN=12V PWM= "High" (Duty=100%)
Luminance uniformity	-	80	-	-	%	
Life time	-	50000	-	-	Hr	
Color	White					

Note: Measure using TOPCON BM7-7AC


9. Optical Characteristics

Item	Conditions	Min.	Typ.	Max.	Unit	Note	
Viewing Angle (CR>10)	Horizontal	θ_L	-	85	-	degree	(1) (4)
		θ_R	-	85	-		
	Vertical	θ_T	-	85	-		
		θ_B	-	85	-		
Contrast Ratio	Center	800	1000	-	-	(1) (2) (4) (6)	
Response Time	Tr + Tf	-	25	35	ms	(3) (4) (6)	
CF Color Chromaticity (CIE1931)	Red x	0.54	0.59	0.64	-	(4) (5) (6)	
	Red y	0.34	0.34	0.44	-		
	Green x	0.30	0.35	0.40	-		
	Green y	0.54	0.59	0.64	-		
	Blue x	0.09	0.14	0.19	-		
	Blue y	0.05	0.10	0.15	-		
	White x	0.25	0.30	0.35	-		
	White y	0.28	0.33	0.38	-		
NTSC		-	53	-	%	(4) (5) (6)	

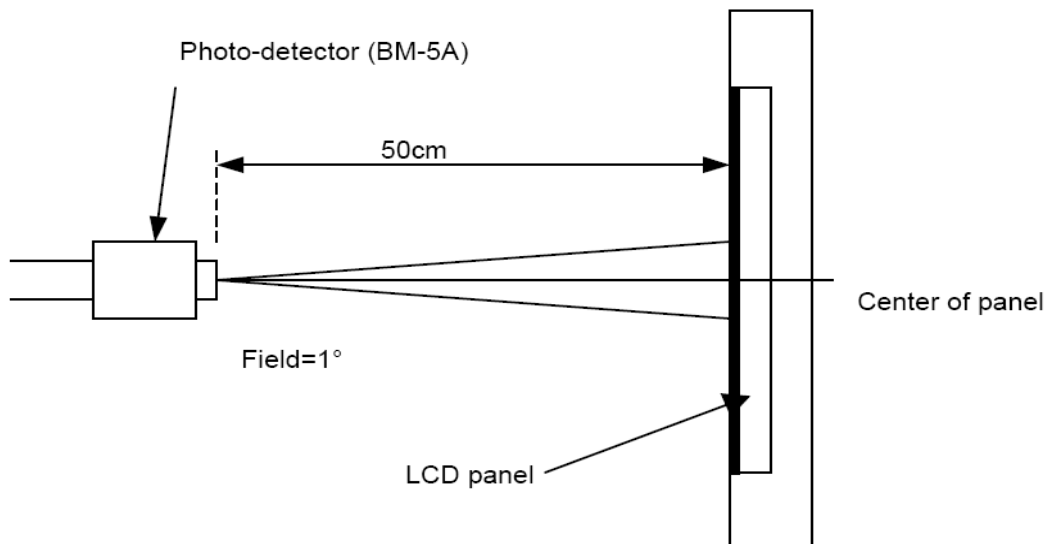Note (1) Measurement Setup: The LCD module should be stabilized at given temp. 25°C for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.



Note (2) Definition of Viewing Angle

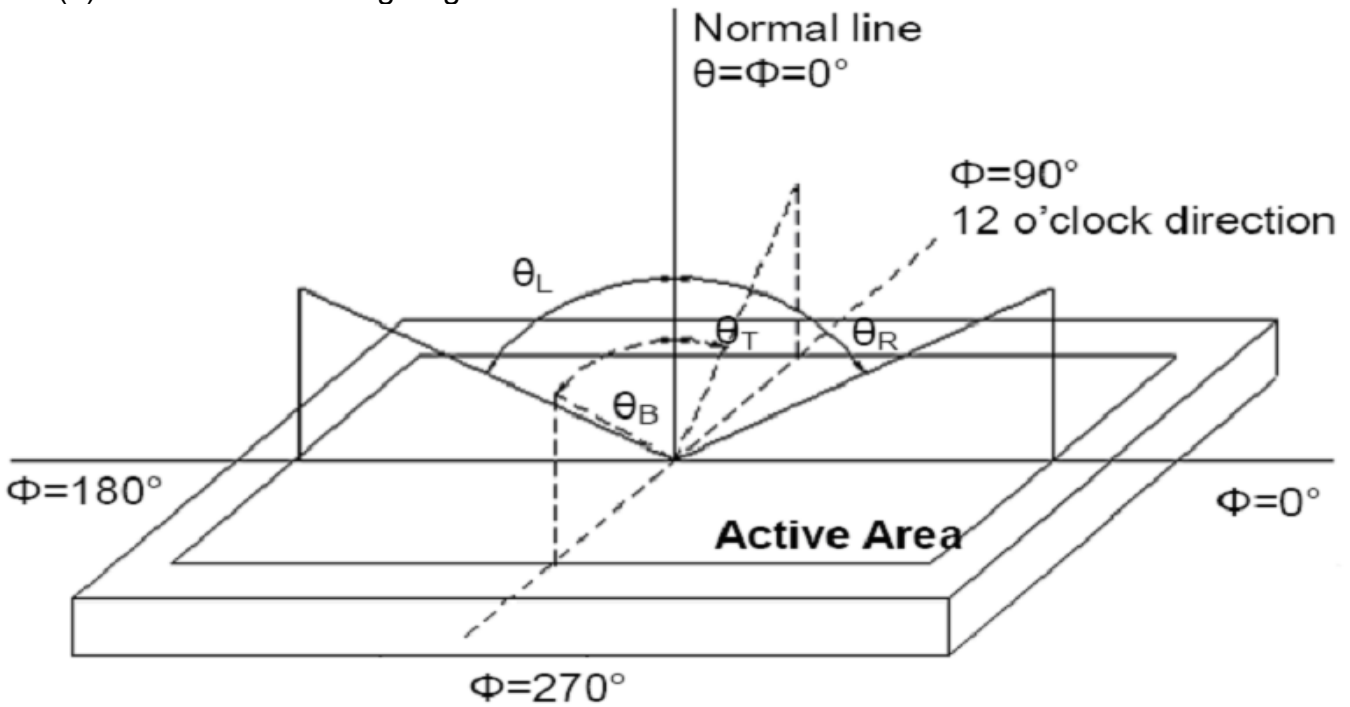


Note (3) Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$

L₆₃: Luminance of gray level 63, L₀: Luminance of gray level 0

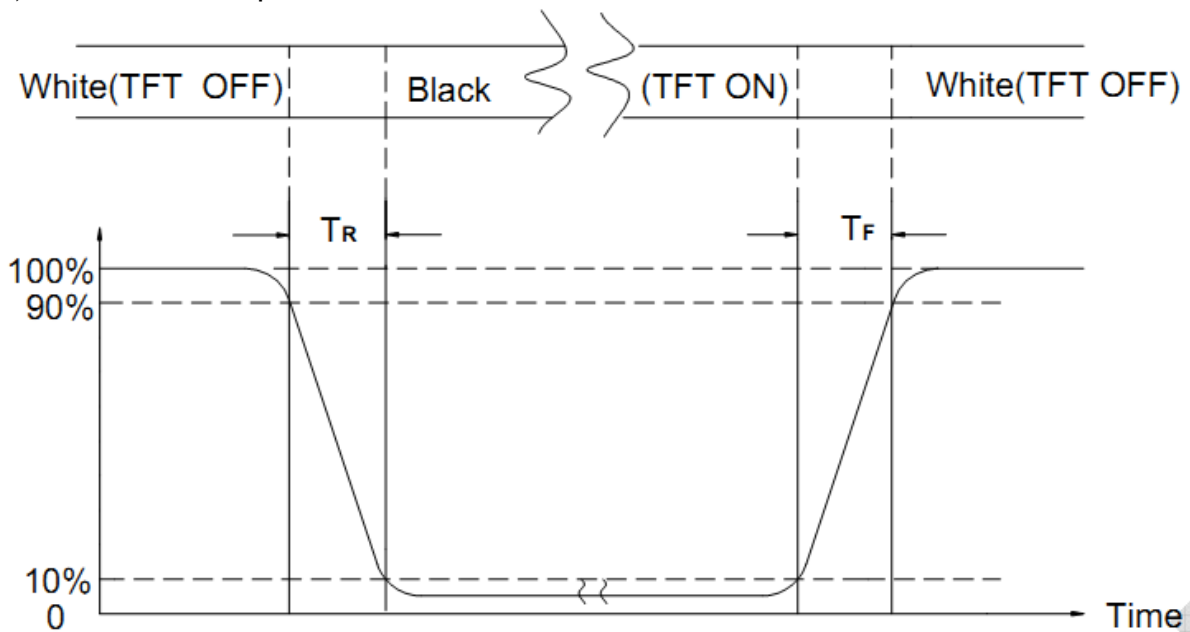Note (4) Definition of response time



Note (5) Definition of Transmittance (Module is without signal input)

$$\text{Transmittance} = \text{Center Luminance of LCD} / \text{Center Luminance of Back Light} \times 100\%$$

Note (6) Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD

10. Reliability Test Conditions and Methods

NO.	Test Items	Test Condition											
①	High Temperature Storage	Keep in $80^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$ Surrounding temperature, then storage at normal condition 4hrs.											
②	Low Temperature Storage	Keep in $-30^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$ Surrounding temperature, then storage at normal condition 4hrs.											
③	High Temperature Operating Test	$70^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$											
④	Low Temperature Operating Test	$-20^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$											
⑤	High Temperature / High Humidity Storage Test	Keep in $60^{\circ}\text{C} \pm 5^{\circ}\text{C} \times 90\% \text{RH} \times 240\text{Hrs}$ Surrounding temperature, then storage at normal condition 4hrs.											
⑥	Temperature Cycling Storage Test	$ \begin{array}{ccccccc} -30^{\circ}\text{C} & \rightarrow & +25^{\circ}\text{C} & \rightarrow & 80^{\circ}\text{C} & \rightarrow & +25^{\circ}\text{C} \\ (30\text{mins}) & & (5\text{mins}) & & (30\text{mins}) & & (5\text{mins}) \\ \leftarrow & & & & & & \rightarrow \\ & & & & 30 \text{ Cycle} & & \end{array} $ Surrounding temperature, then storage at normal condition 4hrs.											
⑦	ESD Test	Air Discharge: Apply 6 KV with 5 times Discharge for each polarity +/-	Contact Discharge: Apply 4 KV with 5 times discharge for each polarity +/-										
		1. Temperature ambience : $15^{\circ}\text{C} \sim 35^{\circ}\text{C}$ 2. Humidity relative : $30\% \sim 60\%$ 3. Energy Storage Capacitance (Cs + Cd): $150\text{pF} \pm 10\%$ 4. Discharge Resistance (Rd): $330\Omega \pm 10\%$ 5. Discharge, mode of operation: Single Discharge (time between successive discharges at least 1 sec) (Tolerance if the output voltage indication : $\pm 5\%$)											
⑧	Vibration Test (Packaged)	1. Sine wave $10 \sim 55$ Hz frequency (1 min/sweep) 2. The amplitude of vibration : 1.5 mm 3. Each direction (X、Y、Z) duration for 2Hrs											
⑨	Drop Test (Packaged)	<table border="1"> <thead> <tr> <th>Packing Weight (Kg)</th> <th>Drop Height (cm)</th> </tr> </thead> <tbody> <tr> <td>0 ~ 45</td> <td>122</td> </tr> <tr> <td>45.4 ~ 90.8</td> <td>76</td> </tr> <tr> <td>90.8 ~ 454</td> <td>61</td> </tr> <tr> <td>Over 454</td> <td>46</td> </tr> </tbody> </table>		Packing Weight (Kg)	Drop Height (cm)	0 ~ 45	122	45.4 ~ 90.8	76	90.8 ~ 454	61	Over 454	46
		Packing Weight (Kg)	Drop Height (cm)										
0 ~ 45	122												
45.4 ~ 90.8	76												
90.8 ~ 454	61												
Over 454	46												
		Drop Direction: ※1 corner / 3 edges / 6 sides each 1time											

11. Inspection Standard

11.1. Quality:

The quality of goods supplied to purchaser shall come up to the following standard.

11.1.1. The method of preserving goods.

After delivery of goods from AMSON to purchaser. Purchaser shall control the LCM AT -10 TO 40, and it might be desirable to keep at the normal room temperature and humidity until incoming inspection or throwing into process line.

11.1.2. Incoming inspection

(A) The method of inspection.

If purchaser make an incoming inspection, a sampling plan shall be applied on the condition that quality of one delivery shall be regarded as one lot.

(B) The standard of quality.

ISO-2859-1 (SAME AS MIL-STD-105E), LEVEL: II

Class	AQL (%)
Critical	0.4 %
Major	0.65 %
Minor	1.5 %

Every item shall be inspected according to the class.

(C) Measure

If as the result of above receiving inspection, a lot out is discovered. Purchaser shall be informed seller of it within seven days. But first shipment within fourteen days.

11.1.3. Warranty policy

AMSON will provide one-year warranty for the products only if under specification operating conditions. AMSON will replace new products for these defect products which under warranty period and belong to the responsibility of AMSON.

11.2. Checking condition:



11.2.1. Checking direction shall be in the 45 degree area to face the sample.







11.2.2. Checker shall see over 300±25 mm. With bare eyes far from sample.

11.3. Inspection Plan:

Class	Item	Judgement	Class
Packing & Indicate	1. Outside and inside package	“Model On.”, “Lot No.” and “Quantity” Should indicate on the package.	Minor
	2. Model mixed and quantity	Other model mixed.....rejected Quantity short or over.....rejected	Critical
	3. Product indication	“Model On.” Should indicate on the product	Major
Assembly	4. Dimension, LCD glass scratch and scribe defect.	According to specification or drawing.	Major
Appearance	5. Viewing area	Polarizer edge or LCD’s sealing line is visible in the viewing area.....rejected	Minor
	6. Blemish, Black spot, White spot in the LCD and LCD glass cracks	According to standard of visual inspection(inside viewing area)	Minor
	7. Blemish, Black spot, White spot and scratch on the polarizer	According to standard of visual inspection (inside viewing area)	Minor
	8. Bubble in polarizer	According to standard of visual inspection (inside viewing area)	Minor
	9. LCD’s rainbow color	Strong deviation color (or newton ring) of LCD.....rejected. Or according to limited sample (if needed, and inside viewing area)	Minor
Electrical	10. Electrical and optical characteristics (contrast, VOP, chromaticity...ETC)	According to specification or drawing. (Inside viewing area)	Critical
	11. Missing line	Missing dot, line, character.....rejected	Critical
	12. Short circuit wrong pattern display	No display, Wrong pattern display, Current consumption out of specification.....rejected	Critical
	13. Dot defect (for color and TFT)	According to standard or visual inspection	Minor

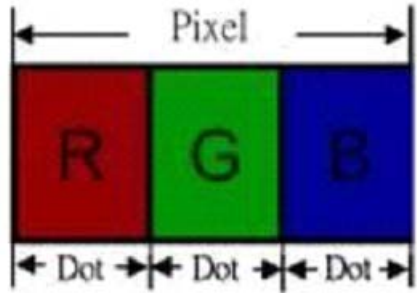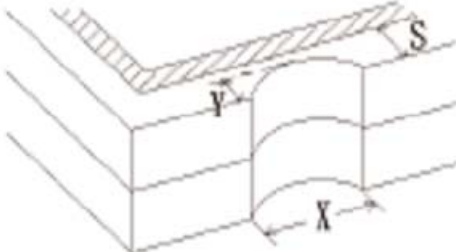11.4. Standard of visual inspection

NO	CLASS	ITEM	JUDGEMENT																						
11.4.1	Minor	Black and white spot foreign material dust in the cell blemish scratch.	<p>(A) Round type: unit: mm</p> <table border="1"> <thead> <tr> <th>Diameter (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$\varnothing \leq 0.2$</td> <td>Distances ≥ 1mm</td> </tr> <tr> <td>$0.2 < \varnothing \leq 0.3$</td> <td>4(Distance ≥ 15mm)</td> </tr> <tr> <td>$0.3 < \varnothing \leq 0.4$</td> <td>3(Distance ≥ 15mm)</td> </tr> <tr> <td>$0.4 < \varnothing$</td> <td>0</td> </tr> </tbody> </table> <p>Note: $\varnothing = (\text{Length} * \text{Width}) / 2$</p> <p>(B) Linear type: unit: mm</p> <table border="1"> <thead> <tr> <th>Length</th> <th>Width</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>-</td> <td>$W \leq 0.03$</td> <td>Distances ≥ 1mm</td> </tr> <tr> <td>$L \leq 4.0$</td> <td>$0.03 < W \leq 0.05$</td> <td>3(Distance ≥ 15mm)</td> </tr> <tr> <td>-</td> <td>$0.05 < W$</td> <td>Follow round type</td> </tr> </tbody> </table> <p>Note: $\varnothing = (\text{Length} * \text{Width}) / 2$</p>	Diameter (mm)	Acceptable Q'ty	$\varnothing \leq 0.2$	Distances ≥ 1 mm	$0.2 < \varnothing \leq 0.3$	4(Distance ≥ 15 mm)	$0.3 < \varnothing \leq 0.4$	3(Distance ≥ 15 mm)	$0.4 < \varnothing$	0	Length	Width	Acceptable Q'ty	-	$W \leq 0.03$	Distances ≥ 1 mm	$L \leq 4.0$	$0.03 < W \leq 0.05$	3(Distance ≥ 15 mm)	-	$0.05 < W$	Follow round type
Diameter (mm)	Acceptable Q'ty																								
$\varnothing \leq 0.2$	Distances ≥ 1 mm																								
$0.2 < \varnothing \leq 0.3$	4(Distance ≥ 15 mm)																								
$0.3 < \varnothing \leq 0.4$	3(Distance ≥ 15 mm)																								
$0.4 < \varnothing$	0																								
Length	Width	Acceptable Q'ty																							
-	$W \leq 0.03$	Distances ≥ 1 mm																							
$L \leq 4.0$	$0.03 < W \leq 0.05$	3(Distance ≥ 15 mm)																							
-	$0.05 < W$	Follow round type																							
11.4.2	Minor	Bubble in polarizer dent on polarizer.	<p style="text-align: right;">unit: mm</p> <table border="1"> <thead> <tr> <th>Diameter (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$\varnothing \leq 0.2$</td> <td>Distances ≥ 1mm</td> </tr> <tr> <td>$0.2 < \varnothing \leq 0.3$</td> <td>4(Distance ≥ 15mm)</td> </tr> <tr> <td>$0.3 < \varnothing \leq 0.5$</td> <td>2(Distance ≥ 15mm)</td> </tr> <tr> <td>$0.5 < \varnothing$</td> <td>0</td> </tr> </tbody> </table>	Diameter (mm)	Acceptable Q'ty	$\varnothing \leq 0.2$	Distances ≥ 1 mm	$0.2 < \varnothing \leq 0.3$	4(Distance ≥ 15 mm)	$0.3 < \varnothing \leq 0.5$	2(Distance ≥ 15 mm)	$0.5 < \varnothing$	0												
Diameter (mm)	Acceptable Q'ty																								
$\varnothing \leq 0.2$	Distances ≥ 1 mm																								
$0.2 < \varnothing \leq 0.3$	4(Distance ≥ 15 mm)																								
$0.3 < \varnothing \leq 0.5$	2(Distance ≥ 15 mm)																								
$0.5 < \varnothing$	0																								
11.4.3	Minor	Dot Defect	<table border="1"> <thead> <tr> <th>Items</th> <th>ACC. Q'TY</th> </tr> </thead> <tbody> <tr> <td>Bright dot</td> <td>$N \leq 2$ (Distance ≥ 15mm)</td> </tr> <tr> <td>Dark dot</td> <td>$N \leq 4$ (Distance ≥ 15mm)</td> </tr> </tbody> </table> <p>Pixel Define:</p>  <p>Note 1: The definition of dot: The size of a defective dot over 1/2 of whole dot is regarded as one defective dot. Definition: $< 1/2 \text{dot}$ and visible by 5% ND filter $N \leq 5$</p> <p>Note 2: Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.</p> <p>Note 3: Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue pattern.</p>	Items	ACC. Q'TY	Bright dot	$N \leq 2$ (Distance ≥ 15 mm)	Dark dot	$N \leq 4$ (Distance ≥ 15 mm)																
Items	ACC. Q'TY																								
Bright dot	$N \leq 2$ (Distance ≥ 15 mm)																								
Dark dot	$N \leq 4$ (Distance ≥ 15 mm)																								
11.4.4	Minor	Mura	Not visible through 5% ND filter in 50% gray or judge by limit sample if necessary.																						
11.4.5	Minor	LCD glass chipping	 <p>$X \geq 3$mm $Y > S$</p>																						

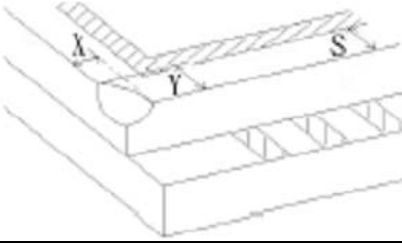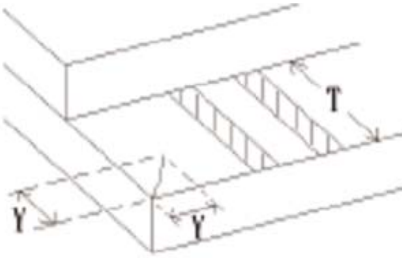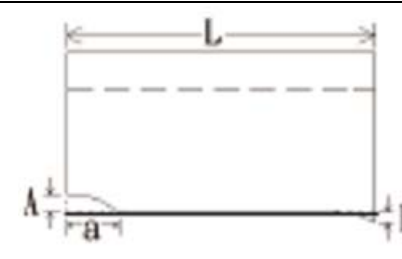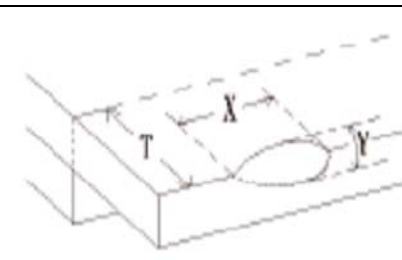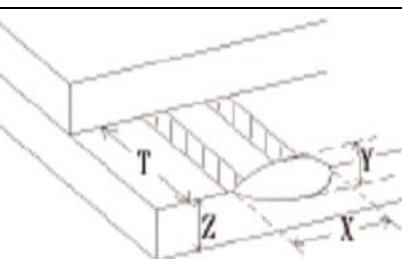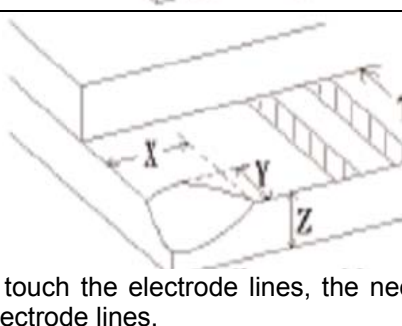11.4.6	Minor	LCD glass chipping		X or Y > S
11.4.7	Minor	LCD glass Glass crack		Continuous burst NG
11.4.8	Minor	LCD glass Scribe defect		According to dimension
11.4.9	Minor	LCD glass Chipping(on the terminal area)		$Y < 1/2Z$ $Y \geq 0.5\text{mm}$ $X \geq 3\text{mm}$
11.4.10	Minor	LCD glass Chipping(on the terminal surface)		$Y < 1/2Z$ $Y \geq 0.5\text{mm}$ $X \geq 3\text{mm}$
11.4.11	Minor	LCD glass chipping		$X \geq 3\text{mm}$ $X \geq T$ <p>If touch the electrode lines, the need to retain the two-thirds electrode lines.</p>

12. Handling Precautions

12.1 Mounting method

The LCD panel of AMSON TFT module consists of two thin glass plates with polarizers which easily be damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

12.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent

[Recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happens by miss-handling or using some materials such as Chlorine (Cl), Sulfur (S) from customer, Responsibility is on customer.

12.3 Caution against static charge

The LCD module uses C-MOS LSI drivers, so we recommend that you:

Connect any unused input terminal to power or ground, do not input any signals before power is turned on, and ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

12.4 packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

12.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- Slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required.

12.6 storing

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
[It is recommended to store them as they have been contained in the inner container at the time of delivery from us.]

12.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

13. Precaution for Use

13.1

A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

13.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification.
- When a new problem is arisen this is not specified in this specification.
- When an inspection specifications change or operating condition change in customer is reported to AMSON TFT and some problem is arisen in this specification due to the change.
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

14. Packing Method

TBD